


SS-B80x1-x-S246

Model No.	X (mm)
Blank	2.0
A	4.0



SLIDER COLOR :

Black : B

White : W





CIRCUIT DIAGRAM

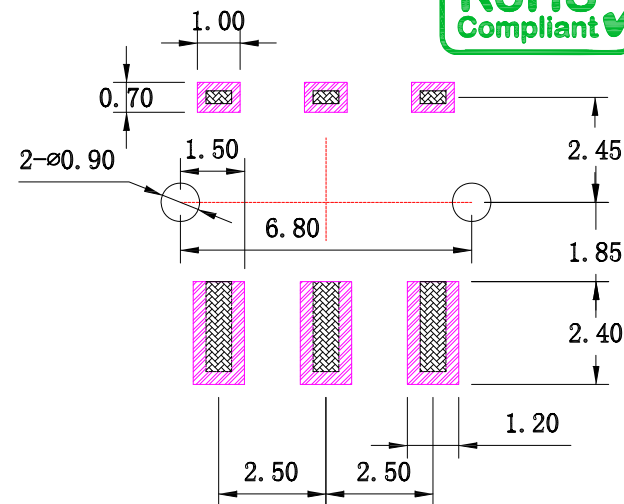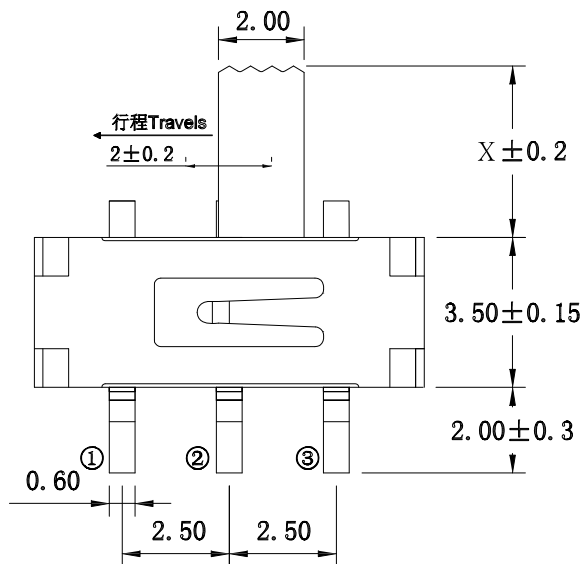

P.C.B LAND PATTERN

SPECIFICATIONS

Rating	100mA , 12V DC
Insulation Resistance	50M Ω Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100m Ω Max.
Operating Force	200 $\pm$ 50gf
Operating Life	10,000 cycles

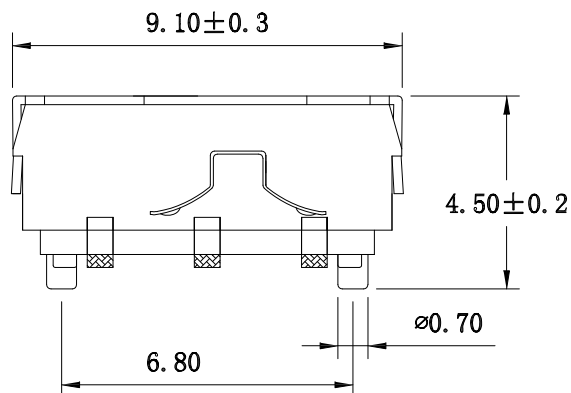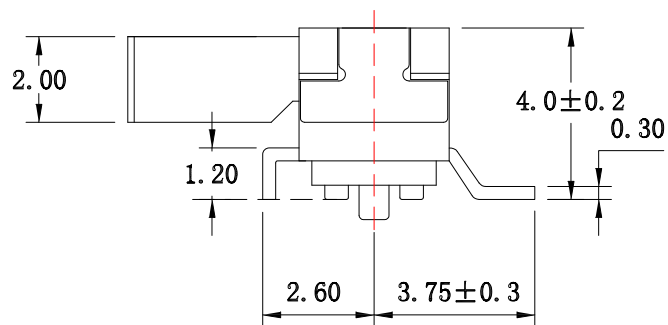

E	TERMINAL	6	PHOSPHOR BRONZE	Ag plated
D	CLIP	2	PHOSPHOR BRONZE	Ag plated
C	COVER	1	SUS	
B	BASE	1	PA6T	Black
A	SLIDER	1	PA46	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

6	更新圖面	Jack	060923
5	更新材質	Jack	011623
4	新增柄長選項	Jack	112522
3	更新圖面	Jack	092319
2	更新圖面	Jack	122618
1	新增尺寸	Jack	112217
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 $\pm$ 0.2
Above 5 ~ 15 $\pm$ 0.3
Above 15 ~ 30 $\pm$ 0.4
Above 30 ~ 50 $\pm$ 0.5
Angle $\pm$ 0.3

3RD.
ANGEL'S

UNITS

MM

DRAWN BY:	DATE
Jack Lu	06/09/23
CHECKED BY:	DATE
Jacky Chen	06/09/23
APPROVED BY:	DATE
Tony Kao	06/09/23

MAT'L		TITLE	SWITCH
FINISH		MODLE	SMT SLIDE SWICTH 撥柄鋸齒狀
SCALE	1 : 1	DWG NO.	SS-B80x1-x-S246
SHEET NO.	1 of 1	PART NO.	SS-B80x1-x-S246
		SIZE	A4
		VER	R6