

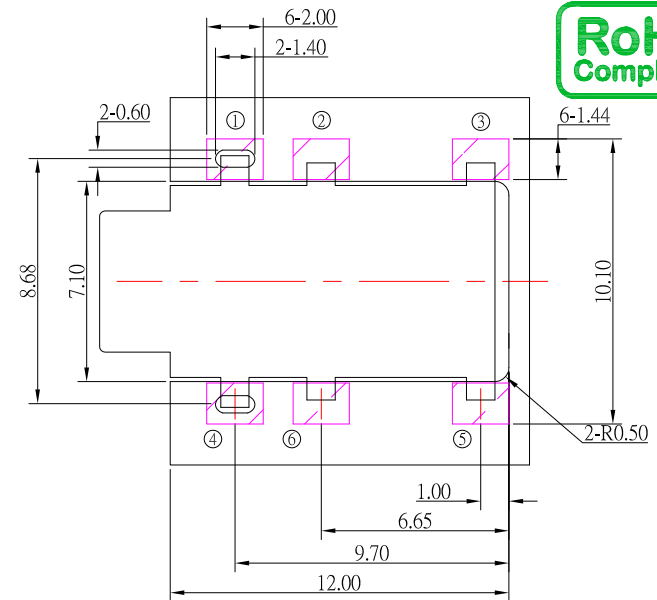
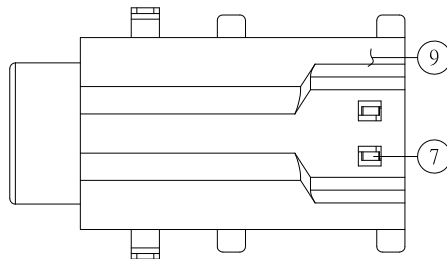
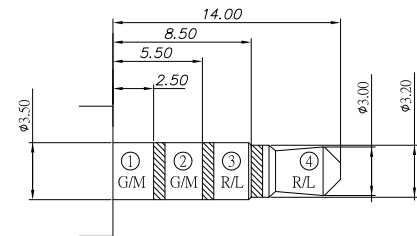
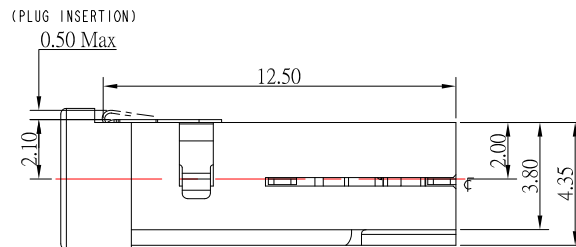
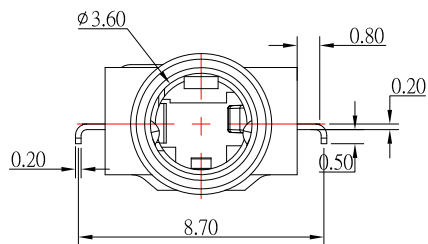


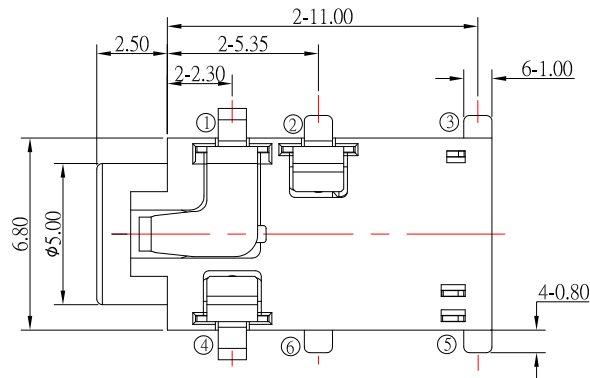

P.C.B LAYOUT

SPECIFICATION

- Rating : DC 5V , 0.5A ;
- Contact resistance : $\leq 70\text{m}\Omega$;
- Insulation resistance : $\geq 100\text{M}\Omega$;
- Withstand voltage : 500VAC ;
- Insertion force : 20N Max;
- Extraction force : $12\pm 5\text{N}$;
- life test : 5,000 cycles .



9	INSERT MOLDING	1	PA9T	BLACK
8	HOUSING	1	PA9T	BLACK
7	7# CONTACT FOOT	1	STAINLESS STEEL PLATE	
6	6# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	12/15/22			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	12/15/22			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-S32339-S214
Tony Kao	12/15/22	1 : 1		
		SHEET NO.	PART NO.	PJ-S32339-S214
				SIZE A4
				VER R3