


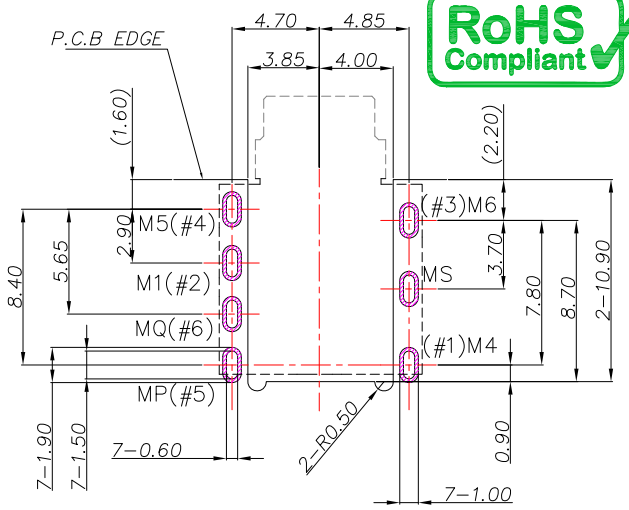
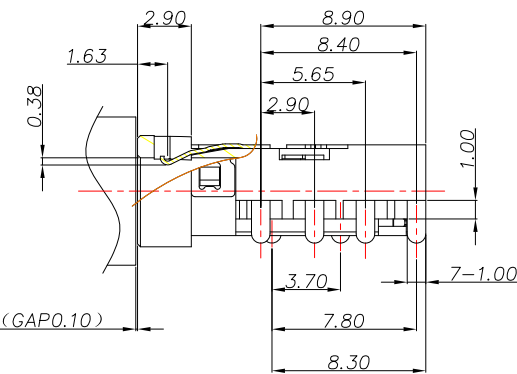
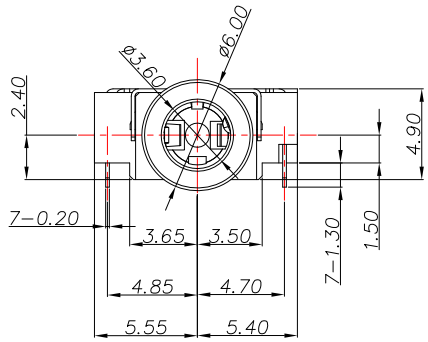
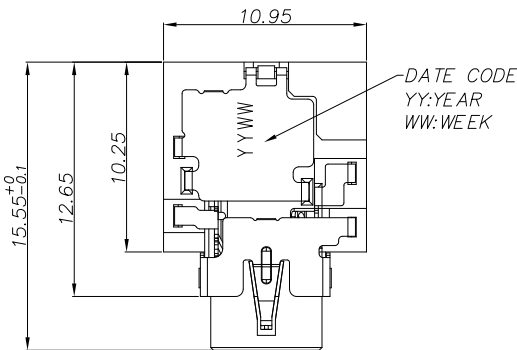




P.C.B LAYOUT
TOP VIEW

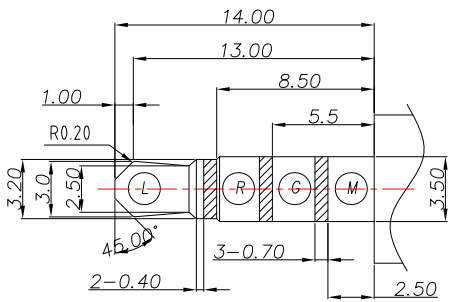

- SPECIFICATION**
- 1.Contact resistance : $\leq 50m\Omega$
 - 2.Insulation resistance : $\geq 100M\Omega$
 - 3.Withstand voltage : 250VAC
 - 4.Insertion and extraction force : 3-30N
 - 5.life test : 5,000 cycles

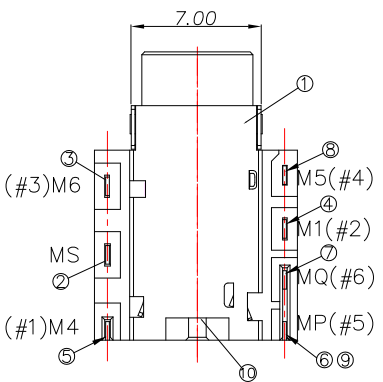

⑩	DUMMY PIN	STAINLESS STEEL	—	1
⑨	SEPARATOR	PA9T	BLACK	1
⑧	M5_CONTACT	C5210	GOLD FLASH ON CONTACT AREA.AND SOLDER AREA ALL OVER Ni	1
⑦	MQ_SHUNT	C5210		1
⑥	MP_CONTACT	C5210		1
⑤	M4_CONTACT	C5210		1
④	M1_CONTACT	C5210	Ni	1
③	M6_CONTACT	C5210		1
②	MS_SHELL	C5210	Ni	1
①	P1_HOUSING	PA9T	BLACK	1
ITEM	DESCRIPTIONs	MATERIAL	FINISH	Q'TY

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	10/31/19	FINISH	MODLE	PHONE JACK
CHECKED BY:	DATE	SCALE	DWG NO.	PJ-S3R4A7-S214
Jacky Chen	10/31/19	1 : 1	PART NO.	PJ-S3R4A7-S214
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	10/31/19			