
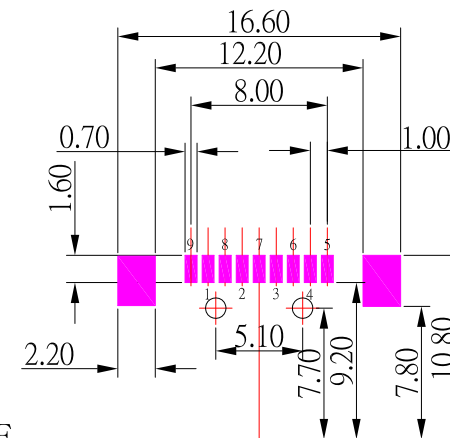
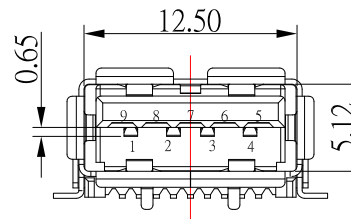
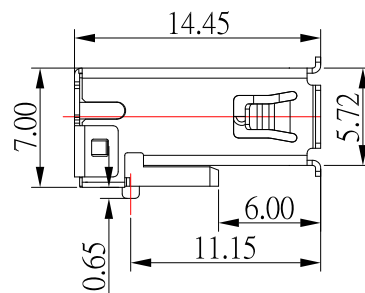






SUA-110M7B-30xHF-S277

鍍層厚度:

Blank : 1u"

2 : 15u"

3 : 30u"

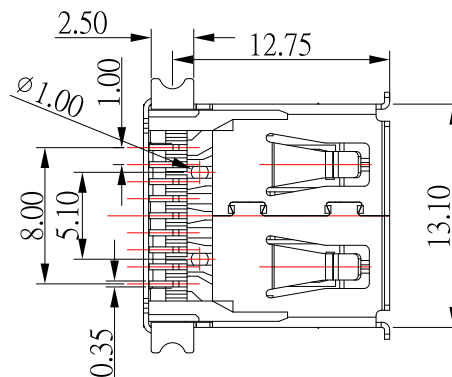

PCB EDGE

RECOMMENDED PCBA LAYOUT

NOTE:

1.MATERIAL:

1.1 Housing: LCP

1.2 Contact: Phosphor Bronze

1.3 Shell: Brass

2.Finish:

2.1 Contact: Plated Gold in Mating Area ;

Tin Plated on Solder Balls ;

Nickel under plated overall

2.2 Shell: Nickel under Plated surface layer

3.SPECIFICATION:

3.1 Current Rate: 1.5 A

3.2 insulator Resistance:100MΩ Min

3.3 Dielectric Strength: 100V AC

3.4 Contact Resistance: 30mΩ Max

3.5 Operation Temperature: -40°C ~ +85°C

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 04/11/23
DATE: 04/11/23
DATE: 04/11/23

MAT'L	TITLE	CONNECTOR
FINISH	MODLE	USB 3.0 AF SMT本體長=14.45mm, 板上高7.0 有捲邊
SCALE	DWG NO.	SUA-110M7B-30xHF-S277
SHEET NO.	PART NO.	SUA-110M7B-30xHF-S277

SIZE
A4
VER
R