

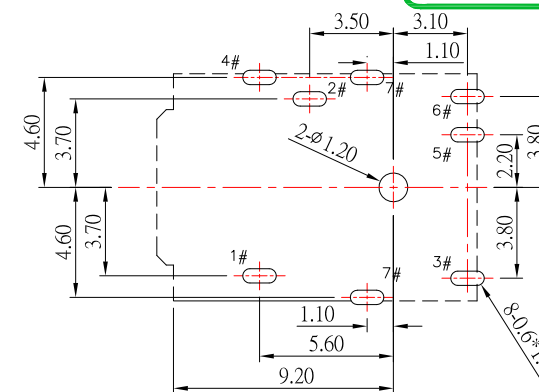



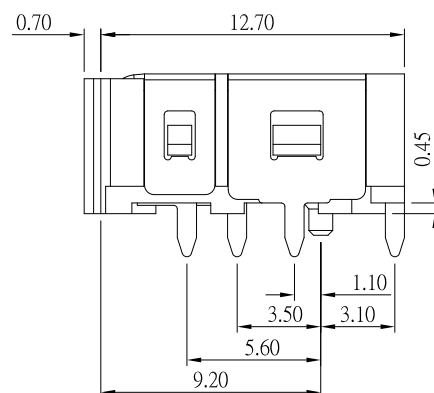

P.C.B LAYOUT
TOP VIEW

SPECIFICATION

- 1.Rating : DC 12V, 1.0A
- 2.Contact resistance : $\leq 50\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

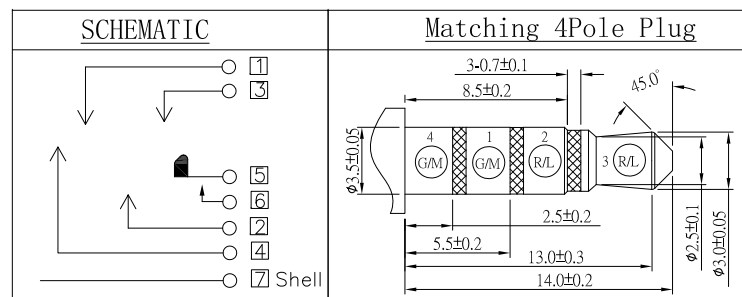

9	HOUSING	1	PA10T	Black
8	INSULATOR	1	PA10T	Black
7	SHELL	1	SUS	Ni-Plating
6	TERMINAL-6	1	PHOSPHOR BRONZE	GOLD FLASH ON CONTACT AREA
5	TERMINAL-5	1	PHOSPHOR BRONZE	GOLD FLASH SOLDER AREA ALL OVER NI
4	TERMINAL-4	1	PHOSPHOR BRONZE	GOLD ON CONTACT AREAALL OVER NI
3	TERMINAL-3	1	PHOSPHOR BRONZE	
2	TERMINAL-2	1	PHOSPHOR BRONZE	GOLD ON CONTACT AREA Matte Sn SOLDER AREA ALL OVER NI
1	TERMINAL-1	1	PHOSPHOR BRONZE	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:	Up to 5 Above 5 ~ 15 Above 15 ~ 30 Above 30 ~ 50 Angle	±0.2 ±0.3 ±0.4 ±0.5 ±0.3°	3RD. ANGEL'S		UNITS	MM
---------------------------------------	--	---------------------------------------	-----------------	---	-------	----

DRAWN BY:	DATE	MAT'L		TITLE	JACK	
Jack Lu	09/18/23	FINISH		MODLE	3.5 PHONE JACK	
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	PJ-D32325E-S457	SIZE
Jacky Chen	09/18/23	SHEET NO.	1 of 1	PART NO.	PJ-D32325E-S457	A4
APPROVED BY:	DATE					VER
Tony Kao	09/18/23					R

7			
ITEM NO.	DESCRIPTION	DRAWN	DATE