

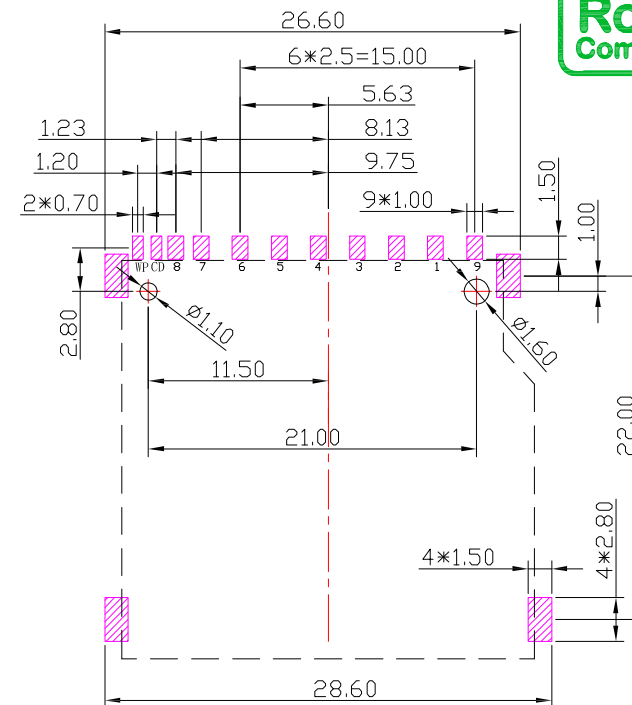
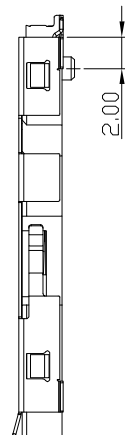


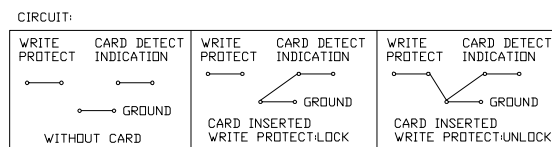

RECOMMEND PCB LAYOUT

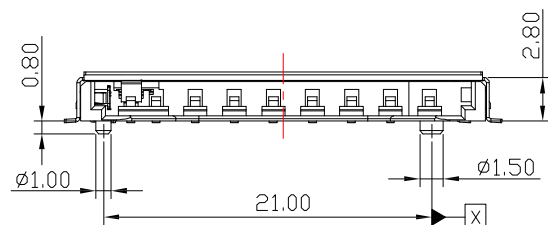

SPECIFICATION

Electrical :

- 1.Current Rating: 0.5A
- 2.Dielectric Withstanding Voltage: 500V AC
- 3.Contact Resistance: 20 mΩ Max.
- 4.Insulation Resistance: 100 MΩ Min.

Environmental:

- 1.Operating Temperature: -25°C ~ +85°C.

Material:

- 1.Housing: LCP
- 2.Contact: Brass
- 3.Shell: Brass

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:	Up to 5	± 0.2	3RD. ANGEL'S		UNITS	MM
	Above 5 ~ 15	± 0.3				
	Above 15 ~ 30	± 0.4				
	Above 30 ~ 50	± 0.5				
	Angle	$\pm 0.3^\circ$				

DRAWN BY:	DATE	MATL		TITLE	CONNECTOR	
Jack Lu	08/19/22					
CHECKED BY:	DATE	FINISH		MODLE	SD 長體 No PUSH SMT TYPE	
Jacky Chen	08/19/22	SCALE	1 : 1	DWG NO.	SD-275A-S267	SIZE
APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	SD-275A-S267	A4
Tony Kao	08/19/22					VER
						R