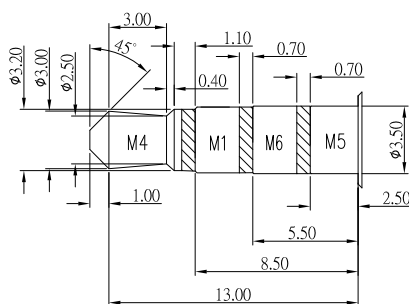
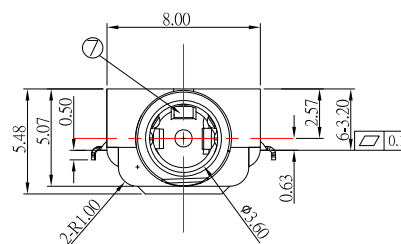
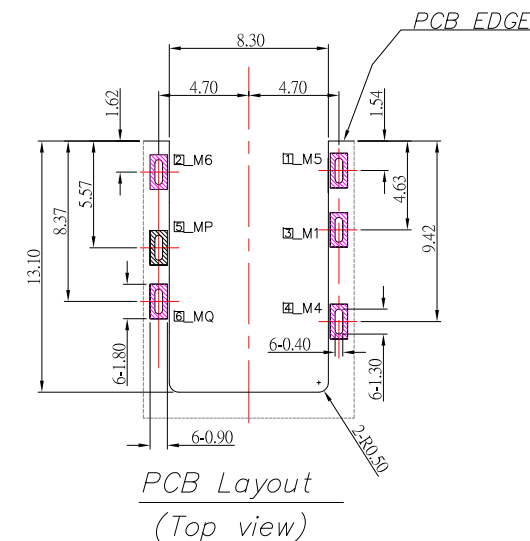
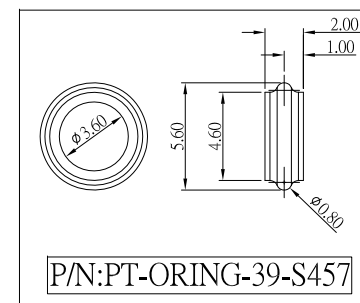


SPECIFICATION

- 1.Rating:6V AC ,1.8A
- 1.Contact resistance : $\leq 50\text{m}\Omega$
- 2.Insulation resistance : $\geq 100\text{M}\Omega$
- 3.Withstand voltage :250VAC
- 5.Insertion and extraction force :3-30N
- 6.life test :10,000 cycles
- 7.Waterproof Lever:IP67

⑨	P2_HOUSING	PA-9T,BLACK		1
⑧	P1_HOUSING	PA-9T,BLACK		1
⑦	M4F_ASSIST PIN	Stainless Steel		1
⑥	M5_GND-CONTACT	PHOSPHOR BRONZE		1
⑤	M6_R2-CONTACT	PHOSPHOR BRONZE		1
④	M4_TIP-CONTACT	Titanium Copper Alloy	Au Plated	1
③	MQ_ON CONTACT	PHOSPHOR BRONZE		1
②	MP_OS CONTACT	PHOSPHOR BRONZE		1
①	M1_R-CONTACT	PHOSPHOR BRONZE		1
	ITEM DESCRIPTIONs	MATERIAL	FINISH	QTY


CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:	Up to 5	± 0.2	3RD. ANGEL'S		UNITS	MM
	Above 5 ~ 15	± 0.3				
	Above 15 ~ 30	± 0.4				
	Above 30 ~ 50	± 0.5				
	Angle	± 0.3°				


ITEM	DESCRIPTIONS	MATERIAL	FINISH	QTY
DRAWN BY: Jack Lu	DATE 12/19/23	MAT'L	TITLE JACK	
CHECKED BY: Jacky Chen	DATE 12/19/23	FINISH	MODLE 3.5mm PHONE JACK 防水型	
APPROVED BY: Tony Kao	DATE 12/19/23	SCALE 1 : 1	DWG NO. PJ-WP32390A-S457	SIZE A4
		SHEET NO. 1 of 1	PART NO. PJ-WP32390A-S457	VER R

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------


IP67

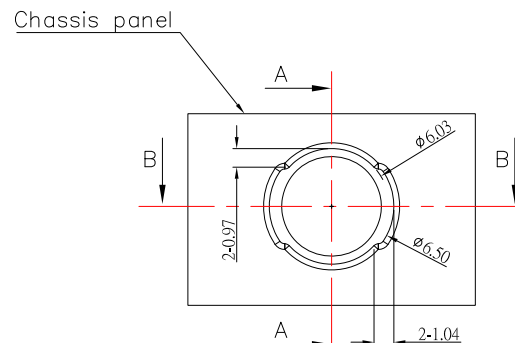


Recommended seal




A-A SECTION

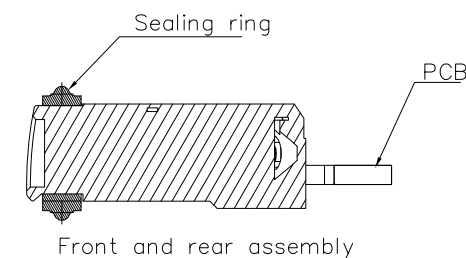


Front and rear assembly



B-B SECTION



Dimensions after
O-ring assembly

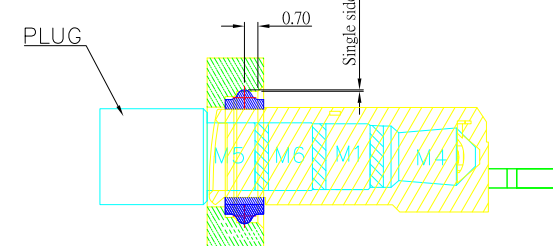

Schematic diagram of male
and female head pointing

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 12/19/23
DATE: 12/19/23
DATE: 12/19/23

MATL
FINISH
SCALE: 1 : 1
SHEET NO. 1 of 1

TITLE: JACK
MODLE: 3.5mm PHONE JACK 防水型
DWG NO.: PJ-WP32390A-S457
PART NO.: PJ-WP32390A-S457

SIZE: A4
VER: R