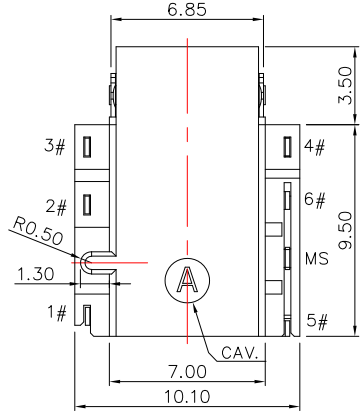
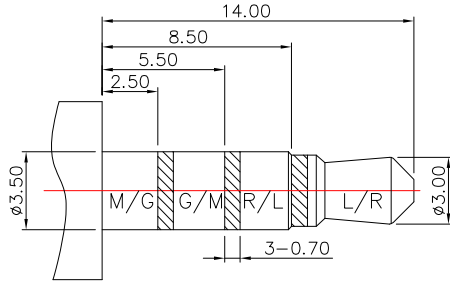
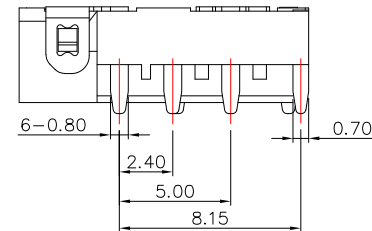

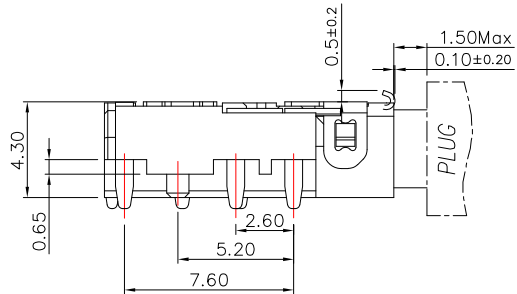
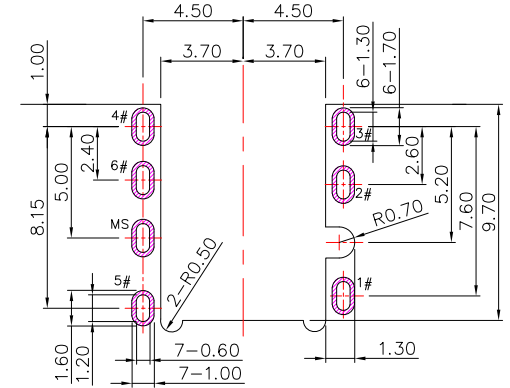
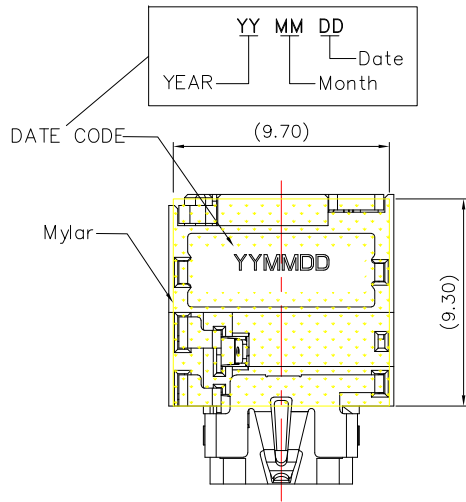


SPECIFICATION

- 1.Rating : DC 30V , 0.5A ;
- 2.Contact resistance : $\leq 50m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 2-30N;
- 6.life test : 5,000 cycles °

K	Mylar	1pcs		
J	Shell	MS 1pcs	SUS	Ni Plated
H	Separator	1pcs	PA10T	BLACK
G	Transfer	5 1pcs	Phosphor Bronze	Au on contact area Gold flash on solder area All over Ni min
F	MAKE terminal	6 1pcs	Phosphor Bronze	
E	TIP Spring	1 1pcs	Phosphor Bronze	
D	Ring B	2 1set	Phosphor Bronze	
C	Ring A	3 1set	Phosphor Bronze	
B	Earth	4 1pcs	Phosphor Bronze	
A	Housing	1pcs	PA10T	BLACK
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

				DRAWN BY: DATE				MAT'L		TITLE		JACK	
				Jack Lu		08/29/24							
				CHECKED BY: DATE		Jacky Chen		08/29/24		FINISH		MODLE	
				APPROVED BY: DATE		Tony Kao		08/29/24		SCALE		DWG NO.	
										1 : 1		PJ-T52309B-S457	
										SHEET NO.		PART NO.	
										1 of 1		PJ-T52309B-S457	
												SIZE	
												A4	
												VER	
												R2	

建倚科技股份有限公司

CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS

MM

2	更新樣式	Jack	082924
1	更新樣式	Jack	052424
ITEM NO.	DESCRIPTION	DRAWN	DATE