






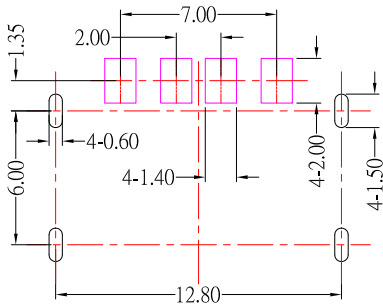


SUA-110M10A-x-S236

Color :
White : W
Black : B



RECOMMENDED PCB LAYOUT

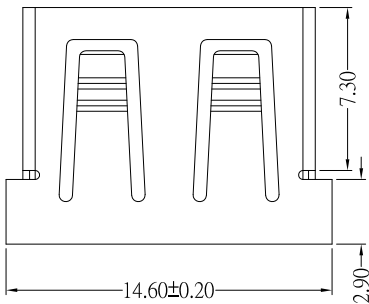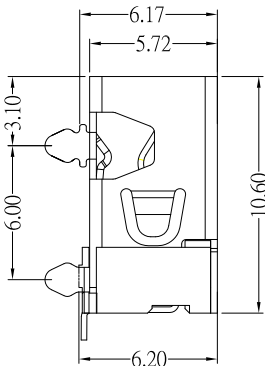

SPECIFICATIONS

Electrical:

- 1.Contact Resistance: 30 mΩ Max
- 2.Insulation Resistance: 1,000 MΩ Min
- 3.Dielectric Withstanding Voltage: 500 V DC
- 4.Insertion Force: 30N Max
- 5.Extraction Force: 10N Min

Material:

- 1.Housing: LCP
- 2.Contact: Phosphor Bronze
- 3.Shell: Brass

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	10/28/22			
CHECKED BY:	DATE	FINISH	MODLE	USB AF 短體10.6 無捲邊 SMT , 四腳插板
Jacky Chen	10/28/22			
APPROVED BY:	DATE	SCALE	DWG NO.	SUA-110M10A-x-S236
Tony Kao	10/28/22	1 : 1		
		SHEET NO.	PART NO.	SUA-110M10A-x-S236
		1 of 1		

SIZE A4
VER R2