

SBC-240M24H-31x-S331

鍍層厚度：

Blank : 1u"
2 : 15u"
3 : 30u"

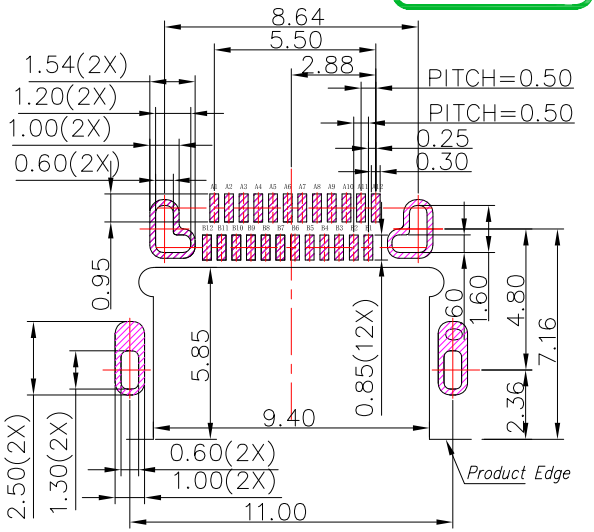

P.C.B. LAYOUT



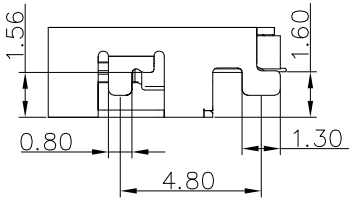

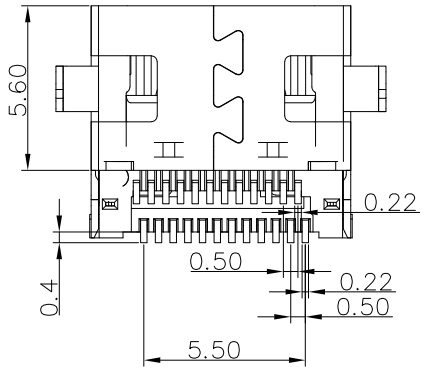

Pin	Signal Name	Mating Sequence	Pin	Signal Name	Mating Sequence
A1	GND	First	B12	GND	First
A2	SSTXp1	Second	B11	SSRXp1	Second
A3	SSTXn1	Second	B10	SSRXn1	Second
A4	V_{BUS}	First	B9	V_{BUS}	First
A5	CC1	Second	B8	SBU2	Second
A6	Dp1	Second	B7	Dn2	Second
A7	Dn1	Second	B6	Dp2	Second
A8	SBU1	Second	B5	CC2	Second
A9	V_{BUS}	First	B4	V_{BUS}	First
A10	SSRXn2	Second	B3	SSTXn2	Second
A11	SSRXp2	Second	B2	SSTXp2	Second
A12	GND	First	B1	GND	First

SPECIFICATIONS

Electrical:

1.Rating: 20V , 5.0 A

2.Dielectric Withstand Voltage: 100V AC

3.Contact Resistance: 40 mΩ Max

4.Insulation Resistance: 100 MΩ Min

Mechanical:

1.Connector Mate and Unmate Force

1.1 Mate force: 5~20 N

1.2 Unmate force: 8~20 N

MATERIAL

1.Housing: LCP

2.Contact: C18150

3.Shell: SUS

Finish:

1.Contact: Plated Gold in Mating Area ;
Gold Plated on Solder Balls ;
Nickel under plated overall

2.Shell: Nickel under Plated surface layer

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新圖面	Jack	042226

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S | UNITS MM

DRAWN BY: Jack Lu	DATE 04/22/26	MAT'L	
CHECKED BY: Jacky Chen	DATE 04/22/26	FINISH	
APPROVED BY: Tony Kao	DATE 04/22/26	SCALE 1 : 1	SHEET NO. 1 of 1

TITLE	CONNECTOR
MODLE	TYPE CF 雙排 SMT 沉板 板上1.56 CH=0.02高導電銅
DWG NO.	SBC-240M24H-31x-S331
PART NO.	SBC-240M24H-31x-S331
SIZE	A4
VER	R1