
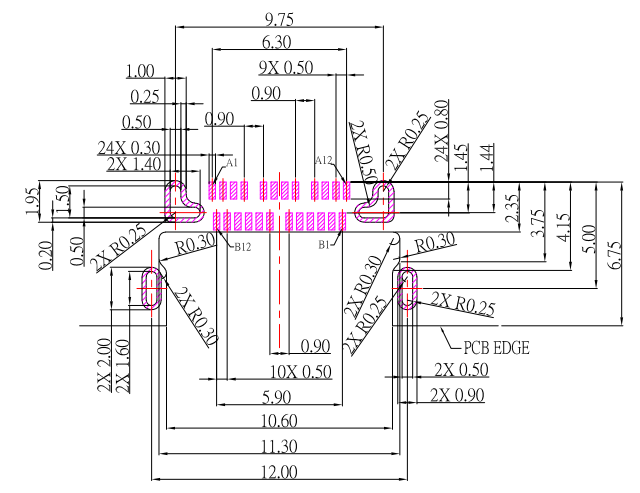


SBC-WP240M8-31x-S410

鍍層厚度：






Blank : 1u"
2 : 15u"
3 : 30u"

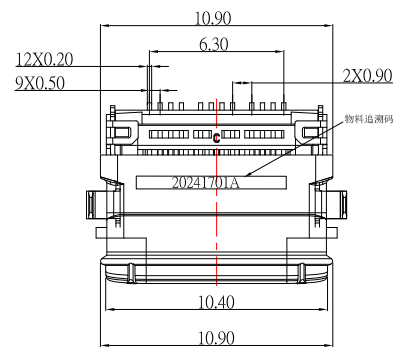

P.C.B LAYOUT

SPECIFICATIONS

- Electrical:**
- 1. Rating: 5.0A , 20V
 - 2.Contact Resistance: 40 mΩ Max
 - 3.Insulation Resistance: 100 MΩ Min
 - 4.Dielectric Withstanding Voltage: 100V AC
- Mechanical:**
- 1.Connector Mate and Unmate Force
 - 1.1 Mate force: 5~20 N
 - 1.2 Unmate force: 8~20 N
- Material:**
- 1.Housing: PA46
 - 2.Contact: C18400
 - 3.Shell: SUS
- Finish:**
- 1.Contact: Plated Gold in Mating Area ;
Gold Plated on Solder Balls ;
Nickel under plated overall
 - 2.Shell: Nickel under Plated surface layer

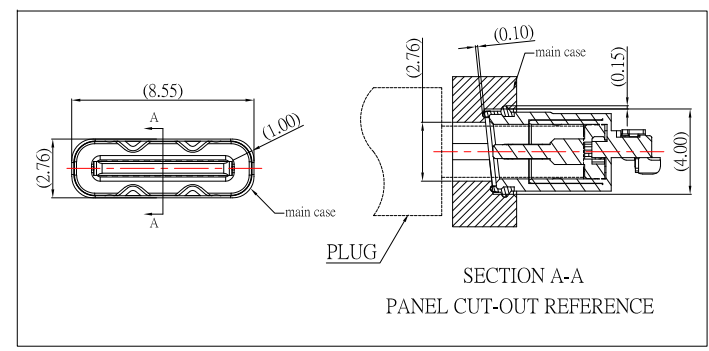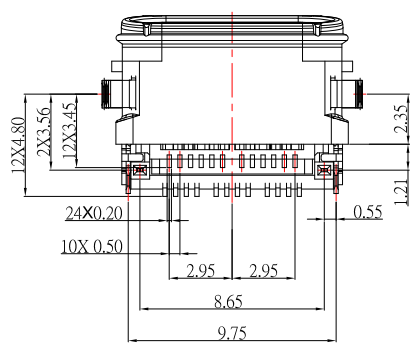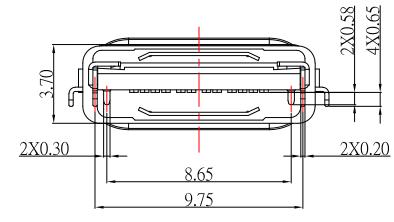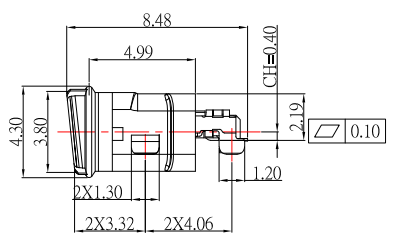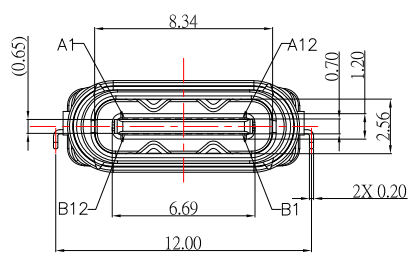

Pin:

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	Vbus	CC1	D+	D-	SBU1	Vbus	RX2-	RX2+	GND
GND	RX1+	RX1-	Vbus	SBU2	D-	D+	CC2	Vbus	TX2-	TX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1