


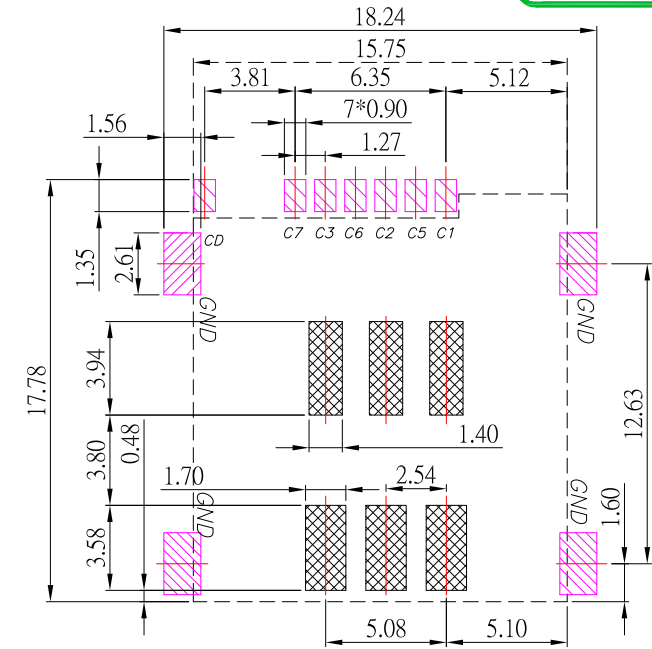
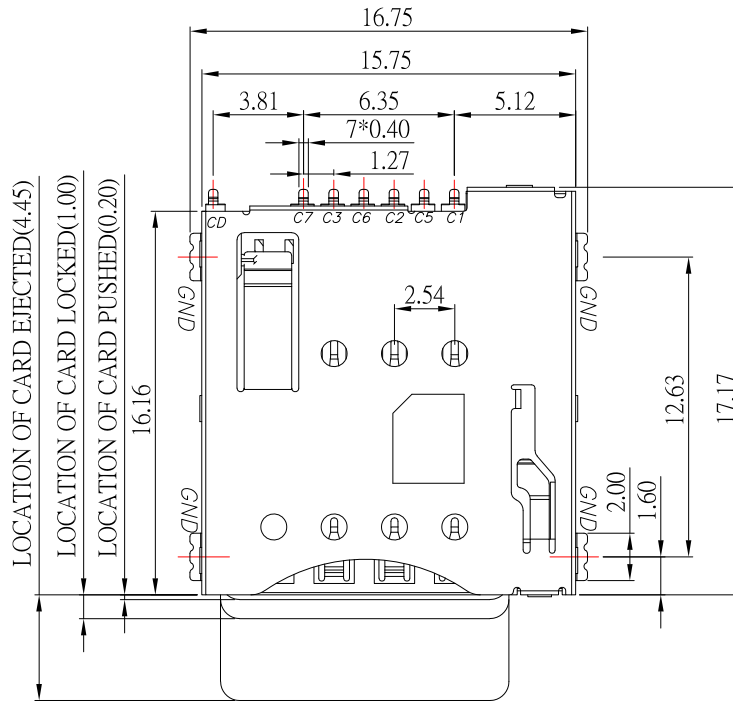
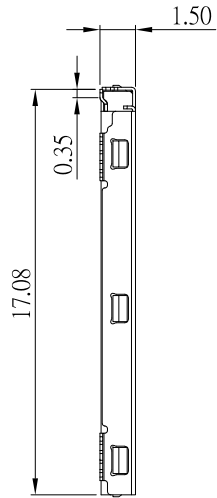


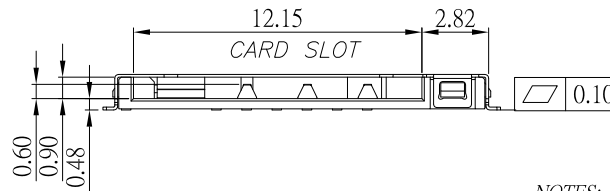

## P.C.B LAYOUT



| ELECTRIC FUNCTION | DETECT SWITCH |
|-------------------|---------------|
| WITHOUT CARD      | CLOSED        |
| CARD INSERTED     | OPEN          |



### NOTES:

#### 1) MATERIAL:

1.1 HOUSING: LCP

1.2 CONTACT: PHOSPHOR BRONZE

1.3 SHELL: SUS

#### 2) FINISH:

2.1 CONTACT: PLATED GOLD IN MATING AREA ;

GOLD PLATED ON SOLDER BALLS ;

NICKEL UNDER PLATED OVERALL

2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER

#### 3) ELECTRICAL CHARACTERISTICS

3.1 RATING CURRENT: 1.0 A

3.2 RATING VOLTAGE: 30V

3.3 CONTACT RESISTANCE: 50 mΩ MAX

3.4 INSULATION RESISTANCE: 1000MΩ MIN

4.5 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC

4.6 OPERATING TEMPERATURE: -40°C ~ +85°C

**CONTACT** 建倚科技股份有限公司  
**CONTACT TECHNOLOGY CORP.**

TOLERANCE UNLESS OTHERWISE STATED :  
Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3

3RD.  
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu  
CHECKED BY: Jacky Chen  
APPROVED BY: Tony Kao  
DATE: 06/03/24  
DATE: 06/03/24  
DATE: 06/03/24

MAT'L  
FINISH  
SCALE  
SHEET NO.

1 : 1  
1 of 1

TITLE  
MODLE  
DWG NO.  
PART NO.

CONNECTOR  
MICRO SIM CARD CONNECTOR  
6+1PIN PUSH H1.50mm  
MSIM-150007-S267  
MSIM-150007-S267  
SIZE: A4  
VER: R

ITEM NO. DESCRIPTION DRAWN DATE