


P.C.B LAYOUT

BC-20013F-G_{xx}-S410

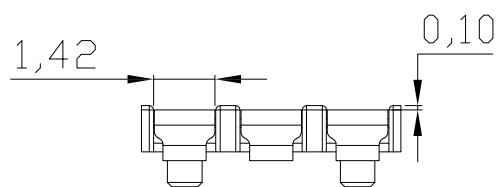

Pin 数	DIM A	DIM B
2P	4.0	2.0
3P	6.0	4.0
4P	8.0	6.0
5P	10.0	8.0
6P	12.0	10.0
7P	14.0	12.0
8P	16.0	14.0

MATERIAL:

- 1.Housing: PA9T,Black
- 2.Contact: Brass,Gold Plated

ELECTRICAL:

- 1.Rating: 30V , 5.0A
- 2.Contact Resistance: 30mΩ Max
- 3.Insulator Resistance: 500 MΩ Min
- 4.Withstanding Voltage: 500V AC
- 5.Operating Temperature: -55°C ~ 125°C

ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MATL	TITLE	CONNECTOR
Jack Lu	10/17/24			
CHECKED BY:	DATE	FINISH	MODLE	BATTERY CONNECTOR
Jacky Chen	10/17/24			
APPROVED BY:	DATE	SCALE	DWG NO.	BC-20013F-G _{xx} -S410
Tony Kao	10/17/24	1 : 1		
SHEET NO.	1 of 1	PART NO.	BC-20013F-G _{xx} -S410	
				SIZE A4
				VER R