


BC-W8801F-xx-S410

PART NO.	DIM A	DIM B	DIM C
03	7.50	4.0	2.0
04	9.50	6.0	4.0
05	11.5	8.0	6.0
06	13.5	10.0	8.0

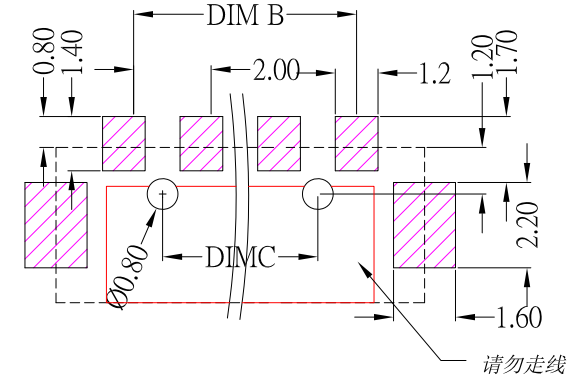





P.C.B LAYOUT

MATERIAL:

- 1.Housing: LCP,Black
- 2.Contact: Phosphor Bronze,Gold Plated

ELECTRICAL:

- 1.Rating: 12V , 2.0A
- 2.Contact Resistance: 30mΩ Max
- 3.Insulator Resistance: 500 MΩ Min
- 4.Withstanding Voltage: 500V AC
- 5.Operating Temperature: -40℃ ~ 85℃

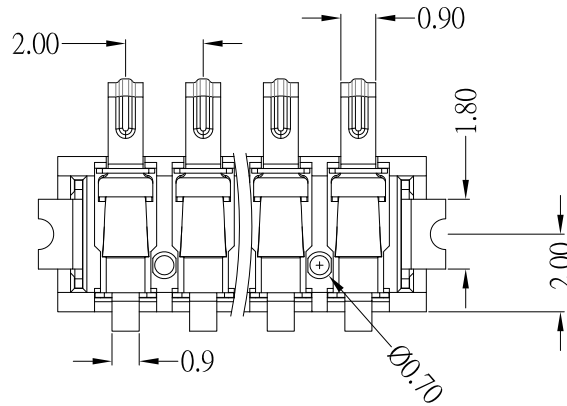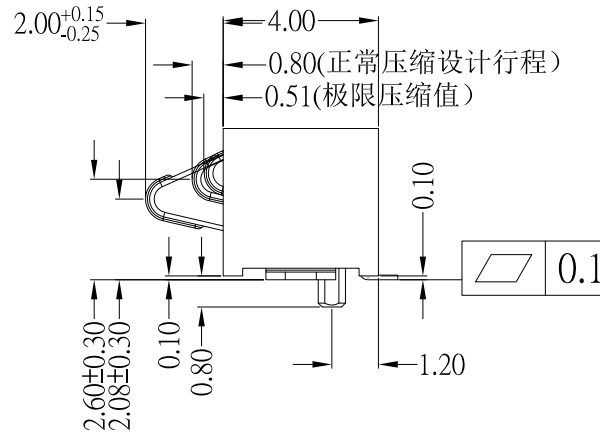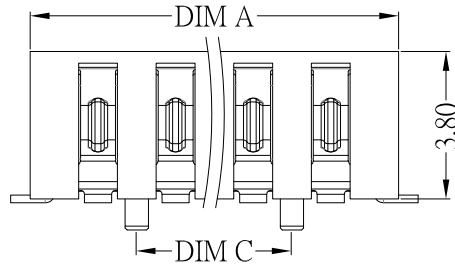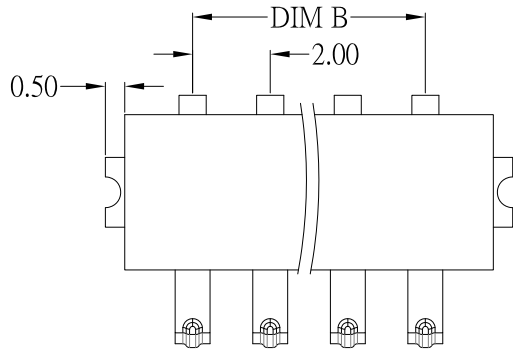

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 04/08/25
DATE: 04/08/25
DATE: 04/08/25

MAT'L
FINISH
SCALE
SHEET NO.

1 : 1
1 of 1

TITLE
MODE
DWG NO.
PART NO.

CONNECTOR
BATTERY CONNECTOR
BC-W8801F-xx-S410
BC-W8801F-xx-S410

SIZE
A4
VER
R