
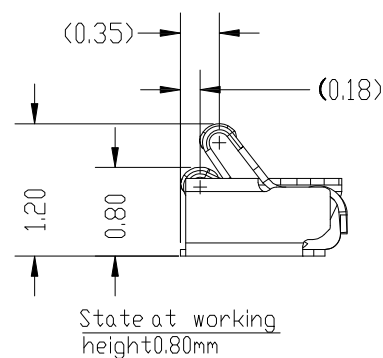
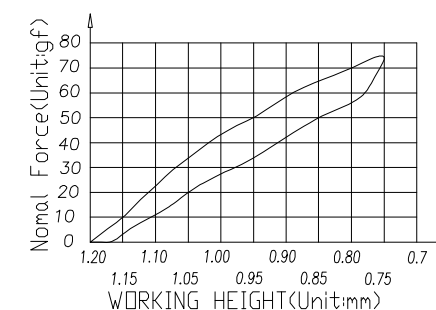

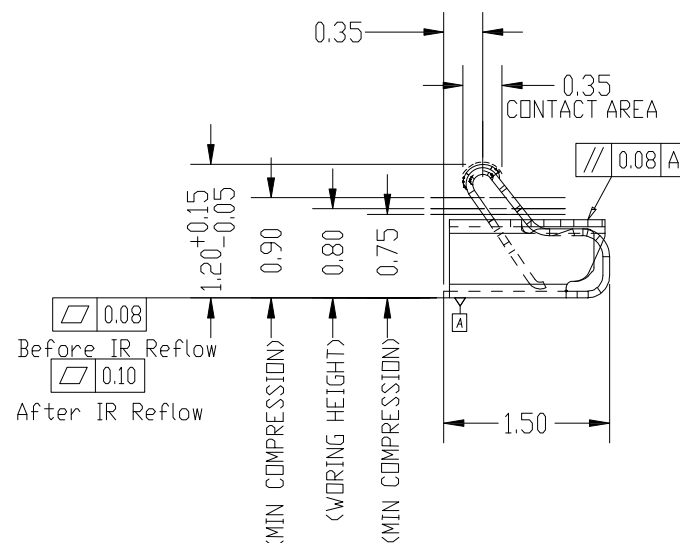

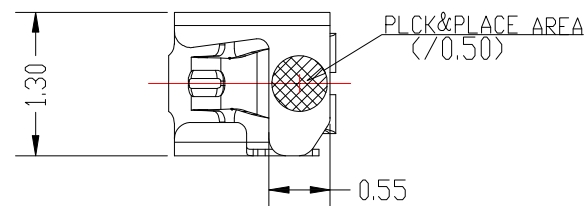


PRODUCT NO.

1. SPECIFICATIONS:

- CONTACT RESISTANCE: 80 mΩ MAX
- VOLTAGE RATING: 1.5V/AC/DC/MAX
- CURRENT RATING: 1.0A/MAX
- PRE-LOAD FORCE: 0.5±0.1N ON CONTACT POINT
- MAX.BEAM DEFLECTION: 0.7±0.1N ON CONTACT POINT
- DURABILITY: 2000 CYCLES
- OPERATING TEMPERATURE: -20°C~80°C

2. MATERIAL:

- STAINLESS STEEL T=0.06±0.005MM

3. FINISH:

- 30μ" MIN. NICKEL UNDERPLATING OVERALL

1	更新料號	Jack	04/29/25
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP.		TOLERANCE UNLESS OTHERWISE STATED:	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
--	--	------------------------------------	--	--------------	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	04/29/25			
CHECKED BY:	DATE	FINISH	MODLE	Antenna Spring Terminal SMT 沉版型 H:1.2mm
Jacky Chen	04/29/25			
APPROVED BY:	DATE	SCALE	DWG NO.	AST-01-S486
Tony Kao	04/29/25	1 : 1		
		SHEET NO.	PART NO.	AST-01-S486
				SIZE A4
				VER R1