



NGF-32S_{x-x}-S268







鍍層厚度:

Blank : 1u"

2 : 15u"

3 : 30u"

M	-6.125	14.0	2.0	14.0	1.5	1.125	1.375
L	-5.125	13.0	3.0	13.0	2.5	1.125	1.375
K	-4.125	12.0	4.0	12.0	3.5	1.125	1.375
J	-3.125	11.0	5.0	11.0	4.5	1.125	1.375
H	-2.125	10.0	6.0	10.0	5.5	1.125	1.375
G	-1.125	9.0	7.0	9.0	6.5	1.125	1.375
F	1.625	6.5	9.5	6.0	9.5	1.375	1.125
E	2.625	5.5	10.5	5.0	10.5	1.375	1.125
D	3.625	4.5	11.5	4.0	11.5	1.375	1.125
C	4.625	3.5	12.5	3.0	12.5	1.375	1.125
B	5.625	2.5	13.5	2.0	13.5	1.375	1.125
A	6.625	1.5	14.5	1.0	14.5	1.375	1.125
PART NO.	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G

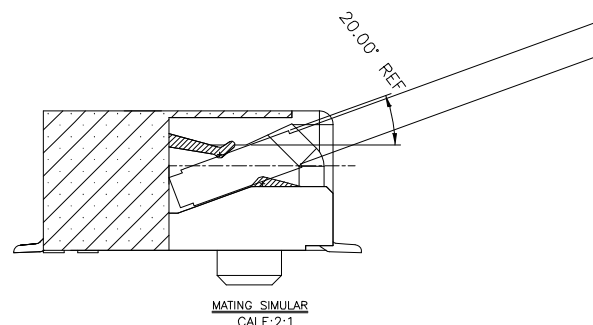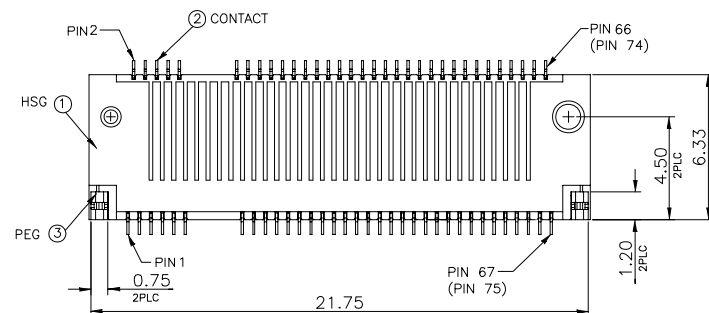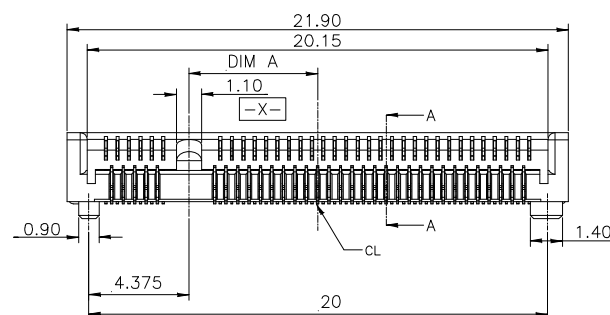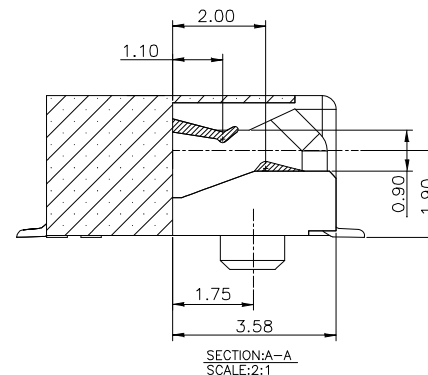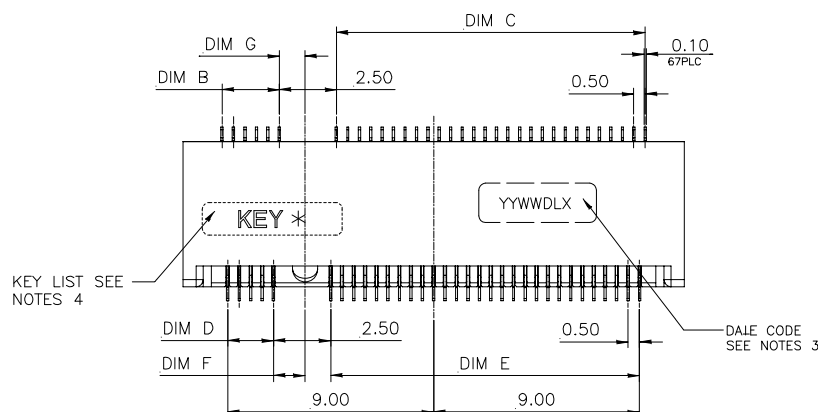

1.MATERIAL:

1.1 Housing: LCP

1.2 Contact: Copper Alloy

1.3 Solder Peg: Stainless Steel

2.Finish:

2.1 Contact: Plated Gold in Mating Area ;

Gold Plated on Solder Balls ;

Nickel under plated overall

2.2 Solder Peg: Tin Plated on Solder Balls

Nickel under plated overall

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 05/31/21
DATE: 05/31/21
DATE: 05/31/21

MAT'L
FINISH
SCALE
SHEET NO.


1 : 1
1 of 2

TITLE
MODLE
DWG NO.
PART NO.


CONNECTOR
NGFF 67P 3.2H CONNECTOR
NGF-32S_{x-x}-S268
NGF-32S_{x-x}-S268

SIZE
A4
VER
R1


ITEM NO. 1
DESCRIPTION 更新料號
DRAWN Jack
DATE 053121

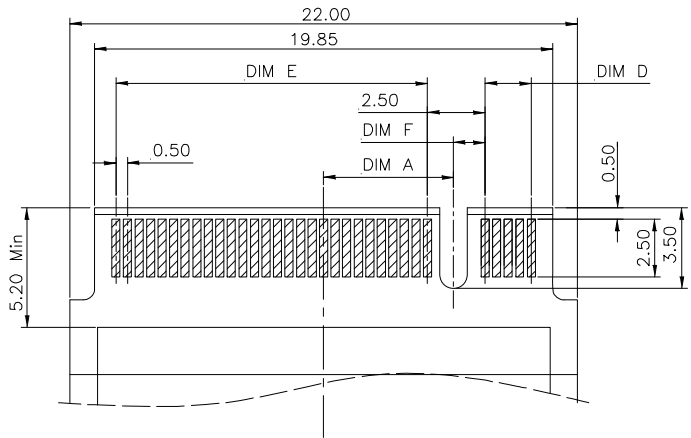


BOTTOM SIDE

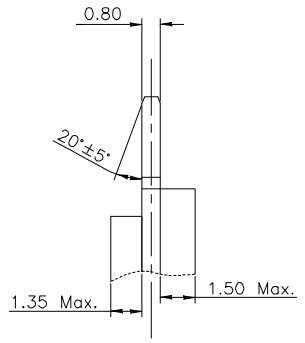


PLUG PCB

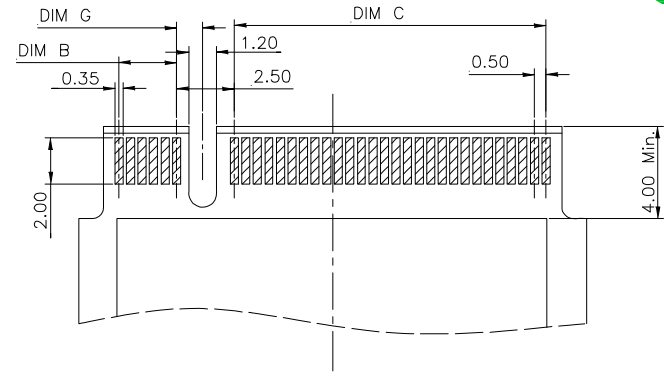

TOP SIDE

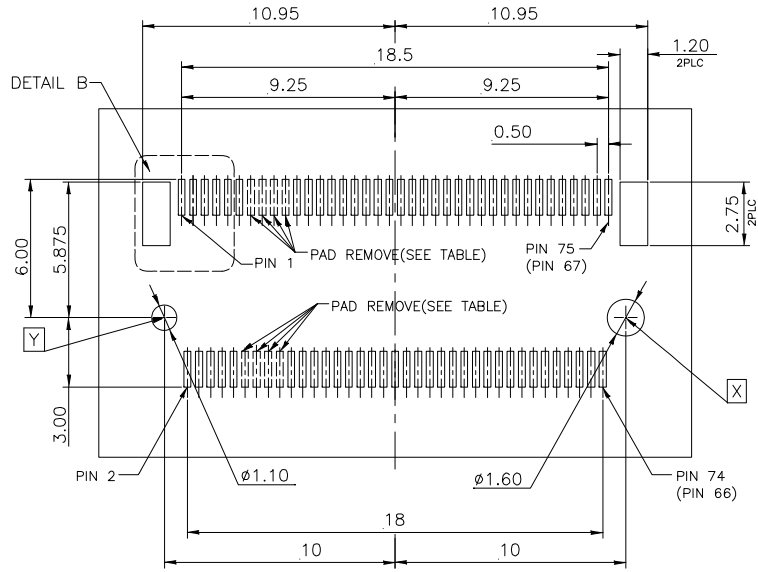

RECOMMEDNED NGFF MOUNTING TYP PCB_LAYOUT



M	-6.125	14.0	2.0	14.0	1.5	1.125	1.375
L	-5.125	13.0	3.0	13.0	2.5	1.125	1.375
K	-4.125	12.0	4.0	12.0	3.5	1.125	1.375
J	-3.125	11.0	5.0	11.0	4.5	1.125	1.375
H	-2.125	10.0	6.0	10.0	5.5	1.125	1.375
G	-1.125	9.0	7.0	9.0	6.5	1.125	1.375
F	1.625	6.5	9.5	6.0	9.5	1.375	1.125
E	2.625	5.5	10.5	5.0	10.5	1.375	1.125
D	3.625	4.5	11.5	4.0	11.5	1.375	1.125
C	4.625	3.5	12.5	3.0	12.5	1.375	1.125
B	5.625	2.5	13.5	2.0	13.5	1.375	1.125
A	6.625	1.5	14.5	1.0	14.5	1.375	1.125
PART NO.	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G

M	PIN 59-66
L	PIN 55-62
K	PIN 51-58
J	PIN 47-54
H	PIN 43-50
G	PIN 39-46
F	PIN 28-35
E	PIN 24-31
D	PIN 20-27
C	PIN 16-23
B	PIN 12-19
A	PIN 8-15
KEY ID	PAD REMOVED



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 05/31/21
DATE: 05/31/21
DATE: 05/31/21

MAT'L
FINISH
SCALE: 1 : 1
SHEET NO. 2 of 2

TITLE
MODLE
DWG NO.
PART NO.

CONNECTOR
NGFF 67P 3.2H CONNECTOR
NGF-32Sx-x-S268
NGF-32Sx-x-S268

SIZE: A4
VER: R1

1	更新料號	Jack	053121
ITEM NO.	DESCRIPTION	DRAWN	DATE