


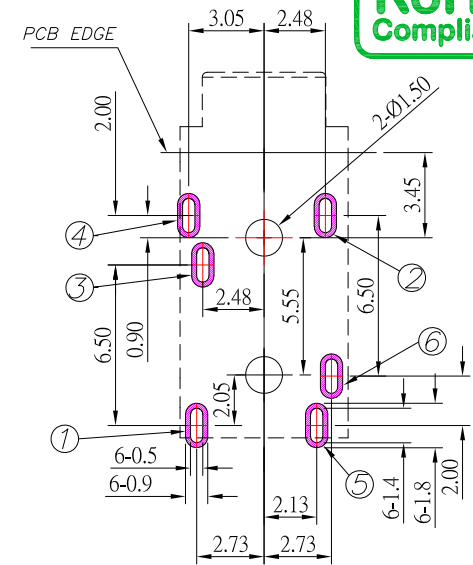

SPECIFICATION

- 1.Rating : 12V ; 1.0A ;
- 2.Contact resistance : $\leq 100\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles °

✓ — ○ ② M/G
 ✓ — ○ ③ AUDIO
 ✓ — ○ ① AUDIO
 △ — ○ ⑤
 L — ○ ⑥ DET
 — ○ ④ G/M

7	HOUSING	1	PA9T ; BLACK
6	TERMINAL 6#	1	PHOSPHOR BRONZE ; NICKEL UNDER PLATING OVERALL, GOLD PLATING ON SOLDER & CONTACT AREA
5	TERMINAL 5#	1	
4	TERMINAL 4#	1	SUSL ; NICKEL UNDER PLATING OVERALL, GOLD PLATING ON SOLDER & CONTACT AREA
3	TERMINAL 3#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL, GOLD PLATING ON SOLDER & CONTACT AREA
2	TERMINAL 2#	1	
1	TERMINAL 1#	1	
ITEM	NAME	Q'TY	DESCRIPTION

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

1	更新圖面	Jack	041526
ITEM NO.	DESCRIPTION	DRAWN	DATE

TOLERANCE UNLESS OTHERWISE STATED:	Up to 5	±0.2	3RD. ANGEL'S		UNITS	MM
	Above 5 ~ 15	±0.3				
	Above 15 ~ 30	±0.4				
	Above 30 ~ 50	±0.5				
	Angle	±0.3°				

DRAWN BY:	DATE	MAT'L		TITLE	JACK	
Jack Lu	04/15/26					
CHECKED BY:	DATE	FINISH		MODLE	PHONE JACK	
Jacky Chen	04/15/26					
		SCALE	1 : 1	DWG NO.	PJ-T32307I-S457	SIZE
APPROVED BY:	DATE					A4
Tony Kao	04/15/26	SHEET NO.	1 of 1	PART NO.	PJ-T32307I-S457	VER
						R1