

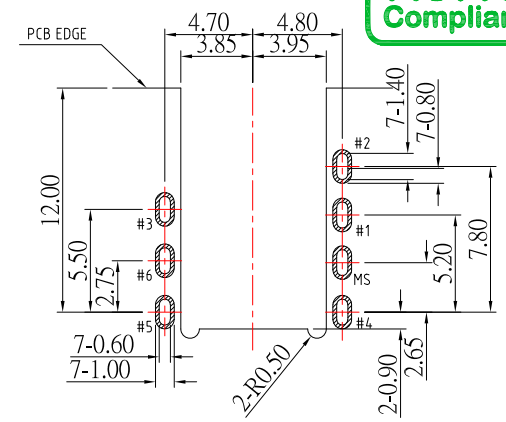

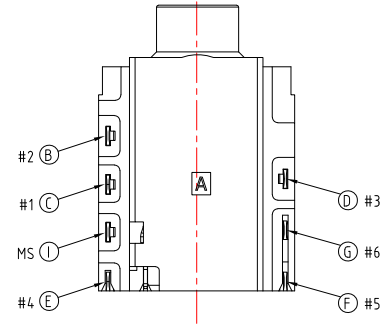
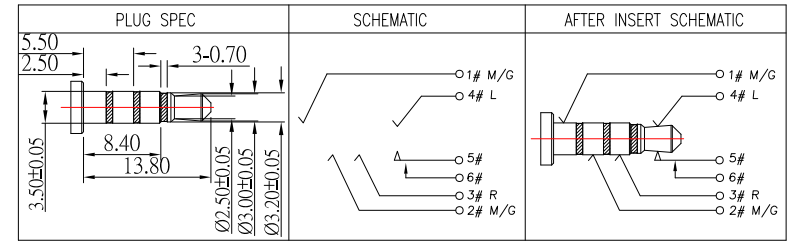
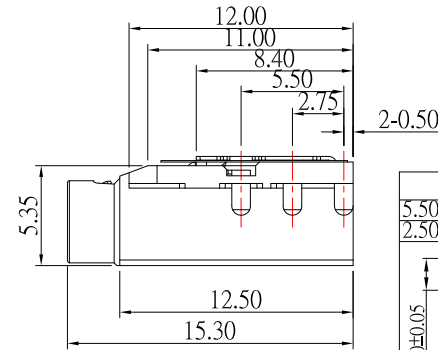


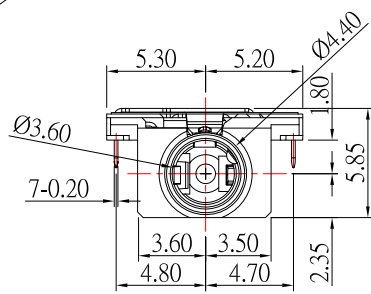

P.C.B LAYOUT
TOP VIEW

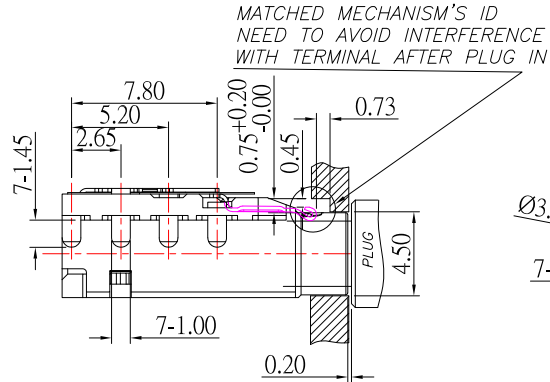

SPECIFICATION

- 1.Rating : 12V ; 0.5A ;
- 2.Contact resistance : $\leq 50\text{m}\Omega$;
- 3.Insulation resistance : $\geq 1000\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles °

J	MYLAR	1	KAPTON	YELLOW
I	SHELL	1	Stainless steel	Ni
H	SEPARATOR	1	PA10T	BLACK
G	MAKE TERNINAL	1	PHOSPHOR BRONZE	CONTACT AREA: GF SOLDER AREA: GF, Ni OVER ALL
F	TRANSFER TERMINAL	1	PHOSPHOR BRONZE	CONTACT AREA: GF SOLDER AREA: MATTE TIN Ni OVER ALL
E	TIP SPRING	1	PHOSPHOR BRONZE	
D	RING A	1	PHOSPHOR BRONZE	
C	EARTH	1	PHOSPHOR BRONZE	
B	RING B	1	PHOSPHOR BRONZE	
A	BODY	1	PA10T	BLACK
NO.	PART NAME	QTY	MATERIAL	DESCRIPTION

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ± 0.2 Above 5 ~ 15 ± 0.3 Above 15 ~ 30 ± 0.4 Above 30 ~ 50 ± 0.5 Angle $\pm 0.3^\circ$	3RD. ANGEL'S	UNITS	MM
-------------------------------------	--	--------------	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	05/19/25	FINISH	MODLE	PHONE JACK 4段1開關段 沉板板下 CH1.8
CHECKED BY:	DATE	SCALE	DWG NO.	PJ-S32309E-S457
Jacky Chen	05/19/25	1 : 1	PART NO.	PJ-S32309E-S457
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	05/19/25			

ITEM NO.	DESCRIPTION	DRAWN	DATE