
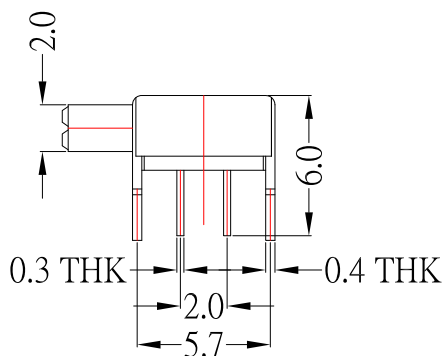


SCHEMATIC (NON-SHORTING)

PCB LAYOUT

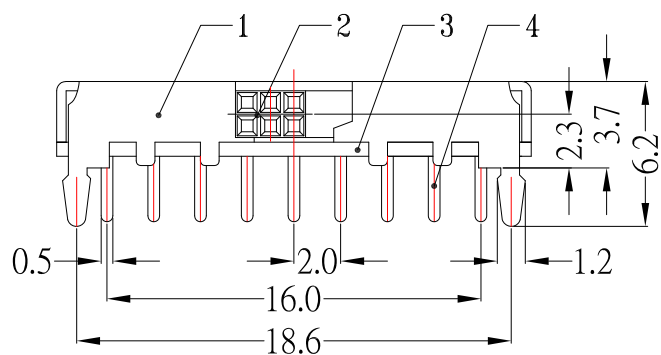

Model No.	X(mm)
SK-62D01P-GA3	3mm
SK-62D01P-GA4	4mm
SK-62D01P-GA5	5mm
SK-62D01P-GA6	6mm

SPECIFICATIONS

Rating	DC 15V 0.5A
Circuit	6P - 2T
Timing	Non - Shorting
Contact Resistance	200mΩ Max.
Insulation Resistance	100MΩ Min.
Operating Force	250gf ±100gf
Operating Life (cycle)	10,000 Min.

NO.	DESCRIPTION	QTY	MATERIAL	REMARK
6	SPRING PLATE	1	SUS	Natural
5	CONTACT CLIP	6	PBS	Ag-Plated
4	TERMINAL	18	BRASS	Ag-Plated
3	BASE	1	PHENOL IC RESIN	Natural
2	KNOB	1	PA66	Black
1	FRAME	1	SPCC	Ni-Plated

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD. ANGEL'S



UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	07/15/20		MODLE	SLIDE SWITCH
CHECKED BY:	DATE	FINISH	SCALE	1 : 1
Jacky Chen	07/15/20		DWG NO.	SK-62D01P-GAx-S191
APPROVED BY:	DATE	SHEET NO.	PART NO.	SK-62D01P-GAx-S191
Tony Kao	07/15/20	1 of 1		

ITEM NO.	DESCRIPTION	DRAWN	DATE
3	新增尺寸	Jack	071520
2	新增SPEC	Jack	080119
1	更新選項	Jack	062419