





CIRCUIT DIAGRAM

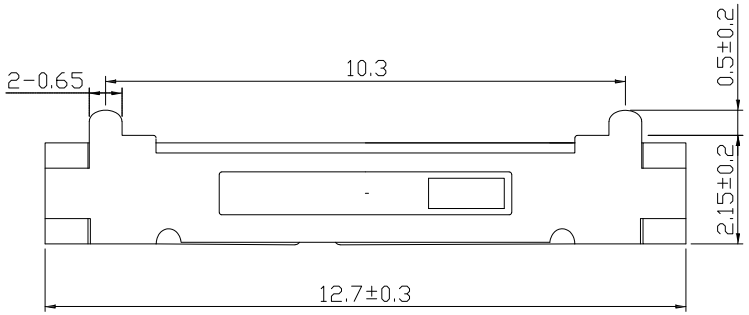

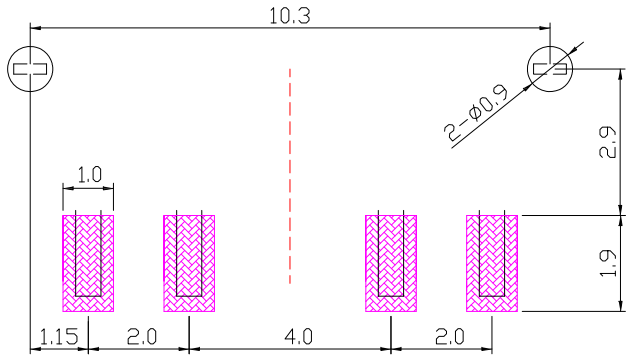

P.C.B LAND PATTERN

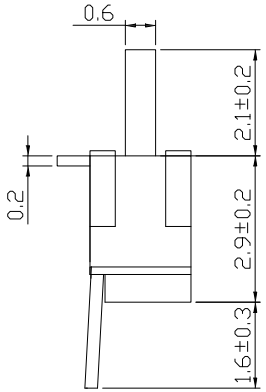

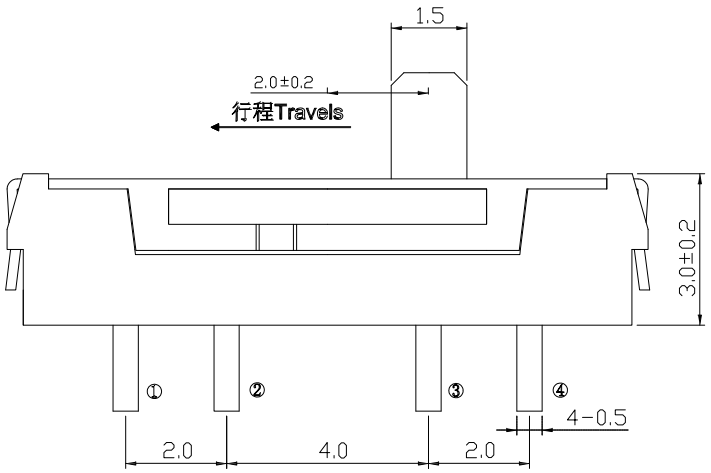

SPECIFICATIONS

Rating	100mA , 12V DC
Insulation Resistance	50MΩ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100mΩ Max.
Operating Force	200 ± 70gf
Operating Life	10,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
E	TERMINAL	4	PHOSPHOR BRONZE	Ag plated
D	CLIP	1	PHOSPHOR BRONZE	Ag plated
C	COVER	1	SUS	
B	BASE	1	LCP	Black
A	SLIDER	1	PA46	Black

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新圖面	Jack	050824

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2, Above 5 ~ 15 ±0.3, Above 15 ~ 30 ±0.4, Above 30 ~ 50 ±0.5, Angle ±0.3°

3RD. ANGEL'S | UNITS MM

DRAWN BY: Jack Lu	DATE 05/08/24	MAT'L	
CHECKED BY: Jacky Chen	DATE 05/08/24	FINISH	
APPROVED BY: Tony Kao	DATE 05/08/24	SCALE 1 : 1	SHEET NO. 1 of 1

TITLE	SWITCH		
MODLE	SMT 三段式 SLIDE SWITCH		
DWG NO.	SS-C70-S246	SIZE	A4
PART NO.	SS-C70-S246	VER	R1