
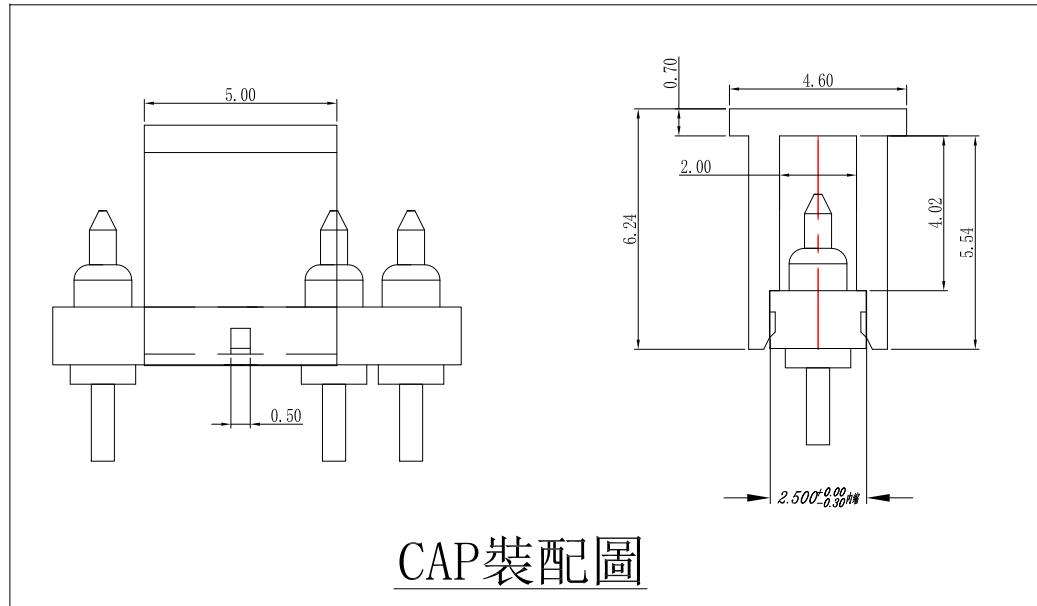
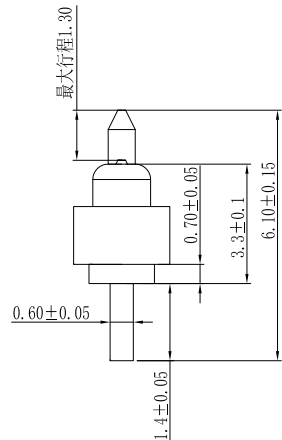


Recommend PCB Layout
Layout Tolerance±0.05

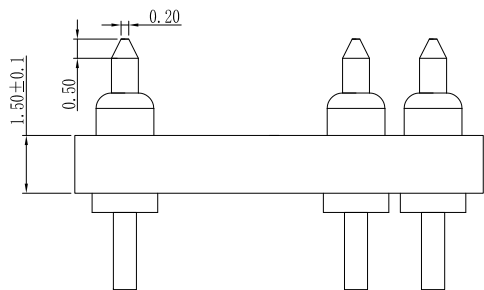

CAP 裝配圖

Notes:

- Material:
 - a.Plunger: C3604
 - b.Barrel: C3604
 - c.Spring: SUS
- Surface treatment (plating):
 - a.plunger:3micro inch Au over 50~100 micro inch nickel ;
 - b.barrel:3micro inch Au over 50~100 micro inch nickel
- Durability: 10000 cycles min;
- Spring force: Stroke 1.1mm 50gf±15gf at normal working height.
- Electrical
 - Rated current & voltage: DC 12V; 1.0A Max.
 - Contact resistance: 50 mohm maximum at normal working height(quiessence)

				建倚科技股份有限公司 CONTACT TECHNOLOGY CORP.						DRAWN BY: DATE		MAT'L		TITLE	CONNECTOR	
										Jack Lu	08/14/25					
										TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3° 3RD. ANGEL'S  UNITS MM						CHECKED BY: DATE
				Jacky Chen	08/14/25											
3	更新尺寸	Jack	081425													SCALE
2	新增CAP图示	Jack	070925							A4						
1	更新尺寸和SPEC	Jack	070825													SHEET NO.
ITEM NO.	DESCRIPTION	DRAWN	DATE	R3												