
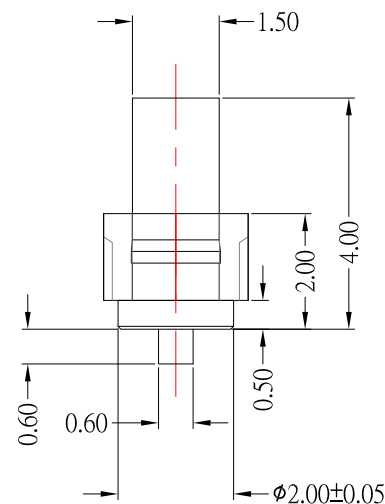
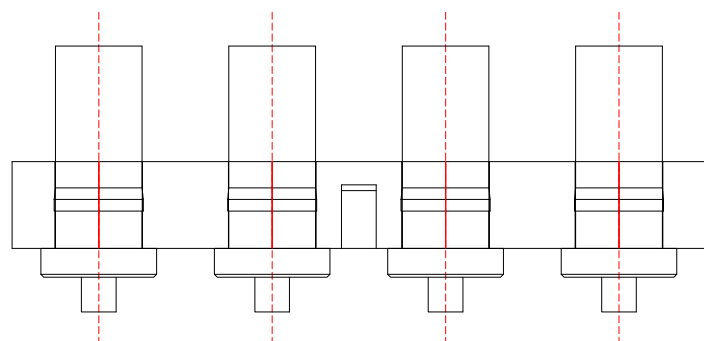


Recommend PCB Layout

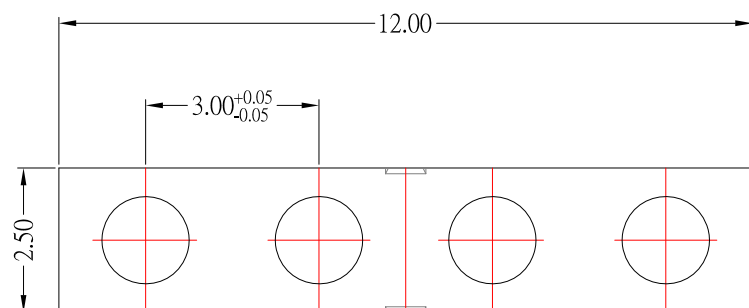

NOTE

1. Material
Plunger: Brass
Housing: PA9T
2. Plating
Plunger: Au over Ni
3. Electrical
Rated current & voltage: DC 12V; 2.0A Max.
4. Mechanical
Durability: 10,000 cycles(minimum)
5. To ensure the best usage, please operate it based on the working height
Based on the engineering drawings, shall not exceed the maximum allowed compression
6. To avoid arcing issue, The adaptor start to power supply after connector mated fully.

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	08/30/22			
CHECKED BY:	DATE	FINISH	MODLE	POGO PIN
Jacky Chen	08/30/22			
APPROVED BY:	DATE	SCALE	DWG NO.	PGC-204006-4P-S353
Tony Kao	08/30/22	1 : 1		
		SHEET NO.	PART NO.	PGC-204006-4P-S353
		1 of 1		

1	新增尺寸	Jack	083022
ITEM NO.	DESCRIPTION	DRAWN	DATE