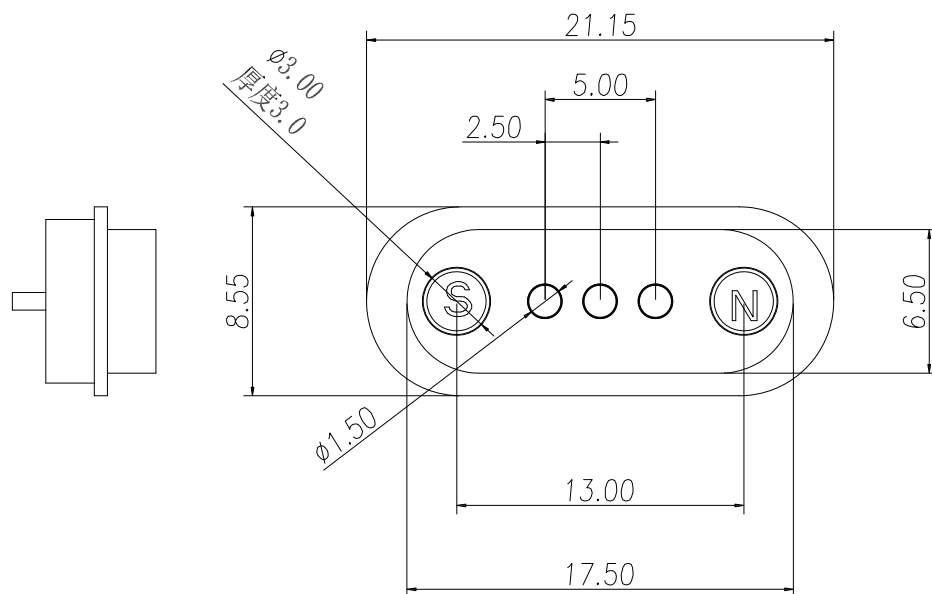


```
1: Material:
   Plunger: C3604
   HOUSING: PA46
```

2: Plating:
Plunger: 3u" Au over 50~120u" Ni

3:Electrical:
Rated Current & Voltage: DC 5V;500MA
Contact Resistance: 50 mohm Max. at working height.
Has Good waterproof and dustproof performance ,the protection level is IP 65

				CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP. TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ± 0.2 Above 5 ~ 15 ± 0.3 Above 15 ~ 30 ± 0.4 Above 30 ~ 50 ± 0.5 Above 50 ~ 100 ± 0.6 Angle ± 0.3° 3RD. ANGEL'S  UNITS MM						DRAWN BY: DATE		MAT'L		TITLE	CONNECTOR		
										CHECKED BY: DATE		FINISH		MODLE	POGO PIN 防水型 IP65		
										Jacky Chen 07/11/24		SCALE	1 : 1	DWG NO.	PGC-W186508-3P-S410	SIZE	A4
										APPROVED BY: DATE						VER	R
ITEM NO.	DESCRIPTION	DRAWN	DATE							Tony Kao 07/11/24	SHEET NO.	1 of 1	PART NO.	PGC-W186508-3P-S410			