

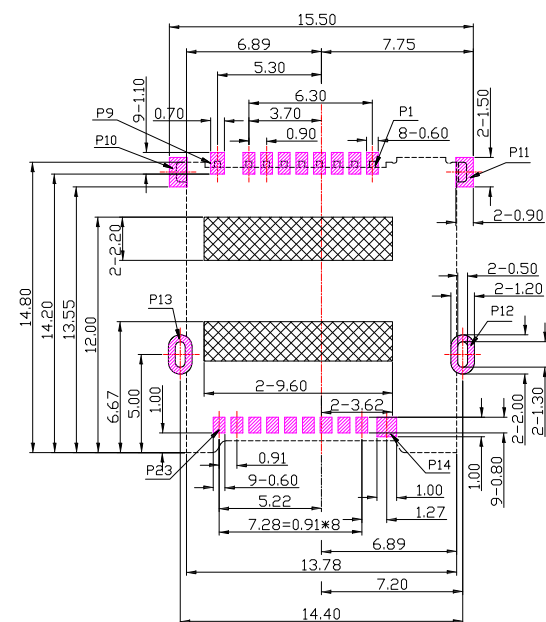



Pin No.	Pin Assignment
P1	MICRO SD DAT2
P2	MICRO SD CD/DAT3
P3	MICRO SD CMD
P4	MICRO SD VDDI
P5	MICRO SD CLK
P6	MICRO SD VSS
P7	MICRO SD DAT0/RCLK
P8	MICRO SD DAT1/RCLK
P9	MICRO SD CD
P10	GND
P11	GND
P12	GND
P13	GND
P14	GND
P15	MICRO SD VDD2
P16	MICRO SD SWIO
P17	MICRO SD VSS
P18	MICRO SD D0+
P19	MICRO SD D0-
P20	MICRO SD VSS
P21	MICRO SD D1-
P22	MICRO SD D1+
P23	MICRO SD VSS

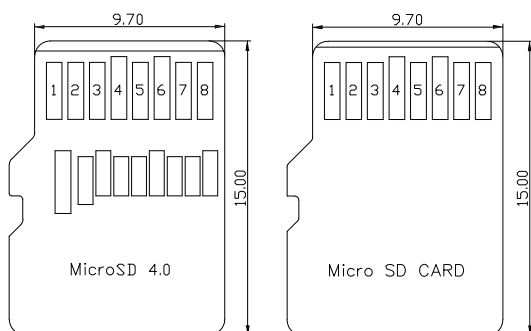

PCB LAYOUT

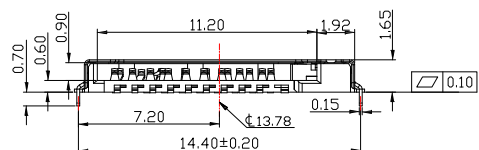

1.Operating Temperature: -25°C ~ +85°C.

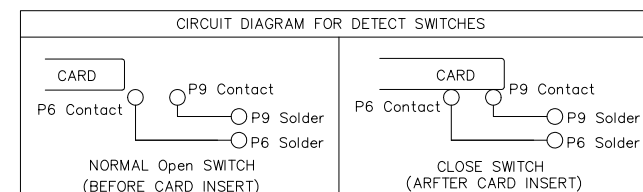

ITEM	PART NAME	Q'TY	MATERIAL	FINISH
1	HOUSING	1	LCP	Black
2	DATA CONTACT	17	C7025	Contact area: Gold plated
3	SWITCH	1	C7025	Contact area: Gold plated
4	SHELL	1	Stainless Steel	Solder area: Gold plated
5	HEART CAM	1	Stainless Steel	
6	CAM PIN	1	Stainless Steel	NO plating
7	SPRING	1	SWP.	Ni plating

1	更新料號	Jack	090825
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 Above 5 ~ 15 Above 15 ~ 30 Above 30 ~ 50 Angle	± 0.2 ± 0.3 ± 0.4 ± 0.5 $\pm 0.3^\circ$	3RD. ANGEL'S		UNITS	MM
--	--	---	-----------------	---	-------	----

DRAWN BY:	DATE
Jack Lu	09/08/25
CHECKED BY:	DATE
Jacky Chen	09/08/25
APPROVED BY:	DATE
Tony Kao	09/08/25

5	MAT'L		TITLE	CONNECTOR	
	FINISH		MODLE	Micro SD 4.0 H1.65 PUSH PUSH TYPE	
5	SCALE	1 : 1	DWG NO.	SD4-M6106-S494	SIZE A4
5	SHEET NO.	1 of 1	PART NO.	SD4-M6106-S494	VER R1