




PJ-D32323H-xx-S457

Color :


Black	: Blank
Pink	: PI
Blue	: BL
Green	: GR

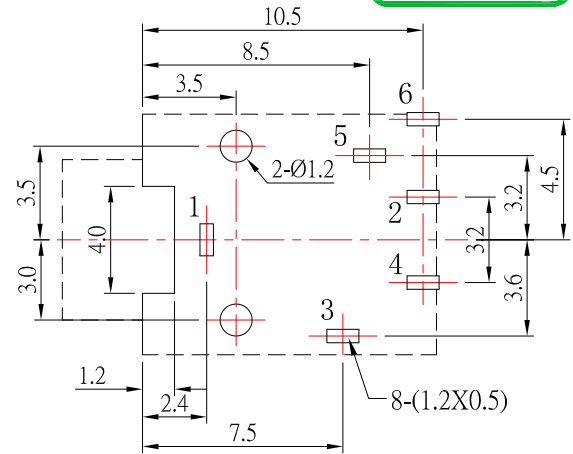



P.C.B LAYOUT
TOP VIEW

SPECIFICATION

- 1.Rating : DC 30V , 0.5A
- 2.Contact resistance : $\leq 30m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles



8	SHELL	1	SUS	
7	HOUSING	1	PA9T	
6	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
5	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
4	CURVE PIECE	1	PHOSPHOR BRONZE	Ag-Plating
3	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
2	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
1	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

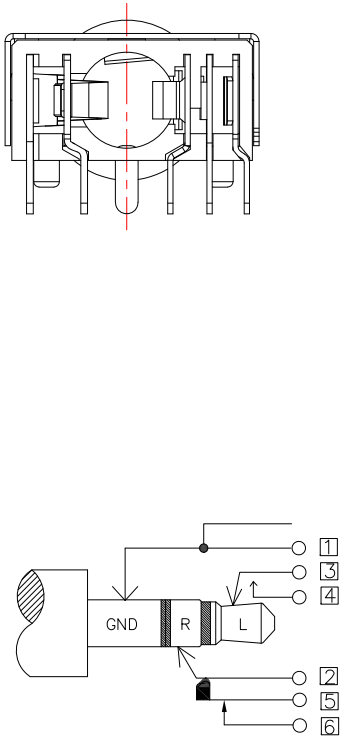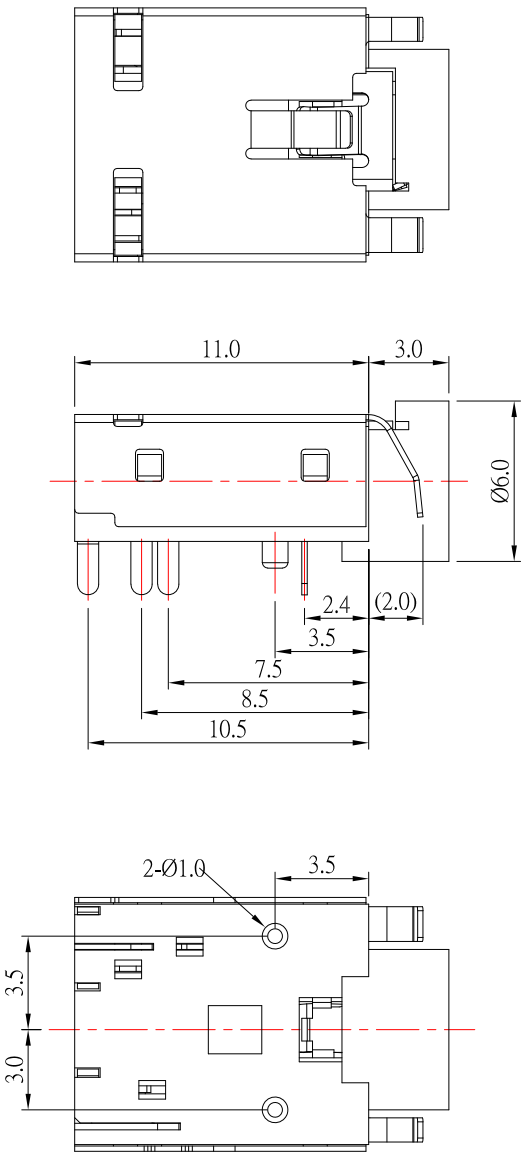

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S		UNITS	MM
-------------------------------------	--	--------------	--	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	05/21/25		MODLE	3.5mm PHONE JACK 6P CH:2.25 Normal Open
CHECKED BY:	DATE	FINISH	DWG NO.	PJ-D32323H-xx-S457
Jacky Chen	05/21/25		PART NO.	PJ-D32323H-xx-S457
APPROVED BY:	DATE	SCALE	1 : 1	
Tony Kao	05/21/25	SHEET NO.	1 of 1	
				SIZE A4
				VER R

ITEM NO.	DESCRIPTION	DRAWN	DATE