

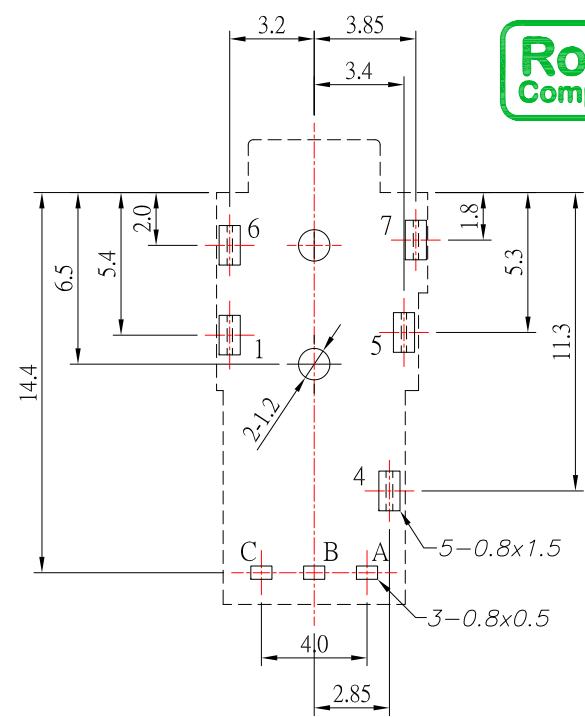
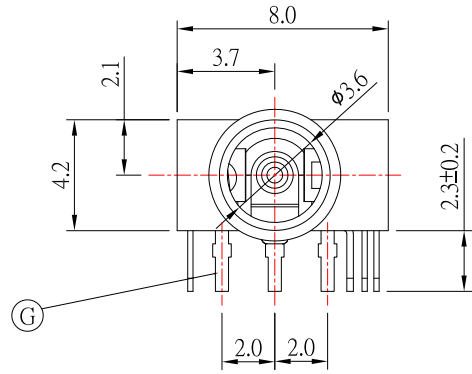
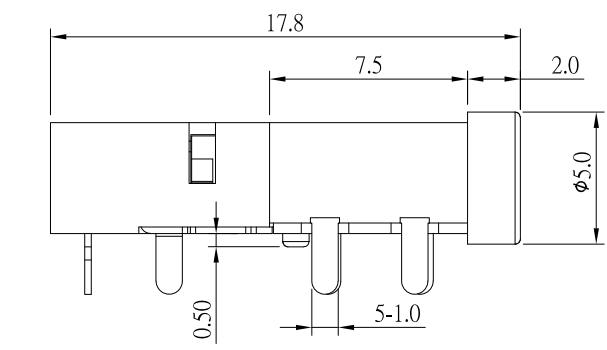
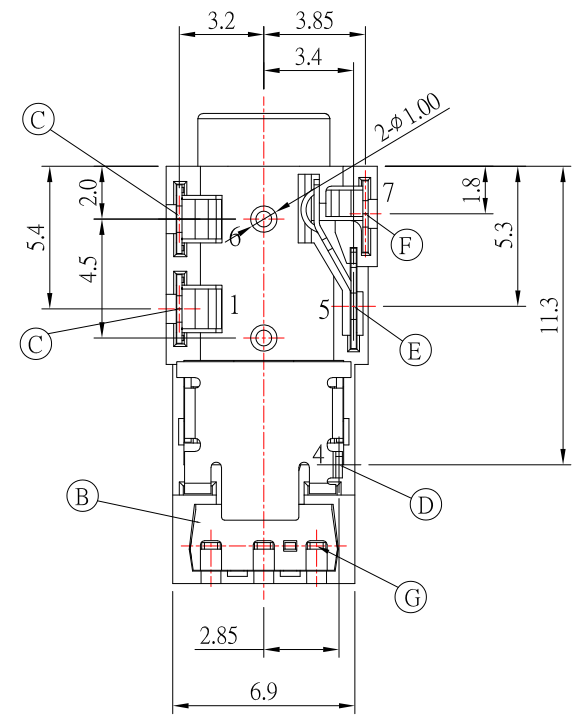


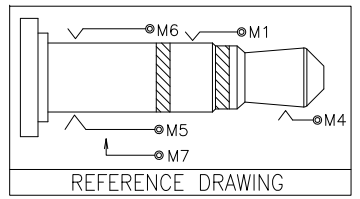

OJ-004A-RXxx-S214

16	16 Mbps
25	25 Mbps



PCB LAYOUT
BOTTOM VIEW

- SPECIFICATIONS:
- 1.CONTACT RESISTANCE: 50mΩ MAX
 - 2.INSULATION RESISTANCE: 100MΩ MIN
 - 3.OPERATING TEMPERATURE RANGE: -25°C TO +85°C.
 - 4. INSERTION FORCE: 3.5kg(Max).
 - 5. EXTRACTION FORCE: 0.4~4.0kg.

ITEM	DESCRIPTIONs	MATERIAL	FINISH	Q' TY
①	DRIVE IC(TX)			1
②	M7	PHOSPHOR BRONZE	Au	1
③	M5	PHOSPHOR BRONZE	Au	1
④	M4	PHOSPHOR BRONZE	Au	1
⑤	M1&M6	PHOSPHOR BRONZE	Au	2
⑥	COVER	PA10T	BLACK	1
⑦	HOUSING	PA10T	BLACK	1

ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	09/16/25	FINISH	MODLE	OPTICAL JACK(接收端)
CHECKED BY:	DATE	SCALE	DWG NO.	OJ-004A-RXxx-S214
Jacky Chen	09/16/25	SHEET NO.	PART NO.	OJ-004A-RXxx-S214
APPROVED BY:	DATE			
Tony Kao	09/16/25			