

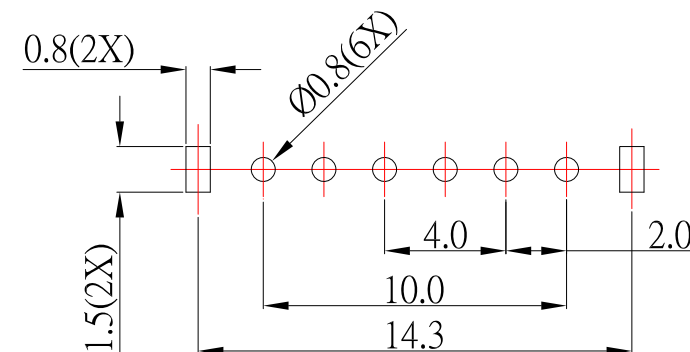


SCHEMATIC (SHORTING)

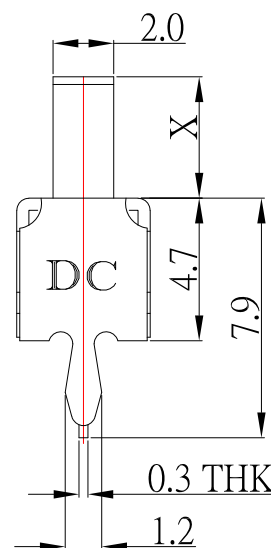

PCB LAYOUT

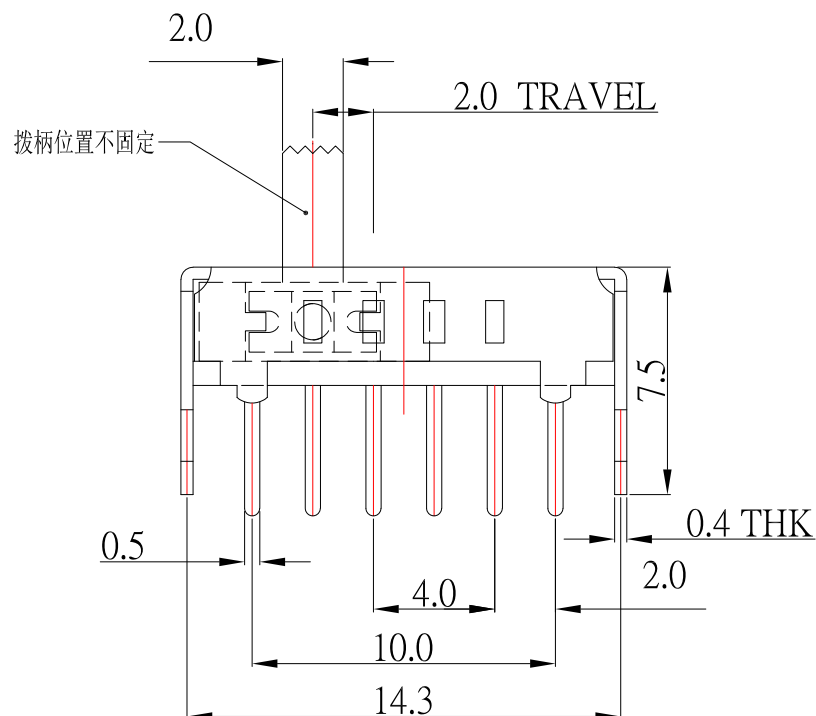

SPECIFICATIONS

Model No.	X(mm)
SS-14D01-GC2	2mm
SS-14D01-GC3	3mm
SS-14D01-GC4	4mm
SS-14D01-GC5	5mm
SS-14D01-GC6	6mm
SS-14D01-GC7	7mm
SS-14D01-GC8	8mm
SS-14D01-GC9	9mm

Rating	DC 50V 0.3A
Circuit	1P - 4T
Timing	Shorting
Contact Resistance	50mΩ Max.
Insulation Resistance	100MΩ Min.
Operating Force	300gf ±100gf
Operating Life (cycle)	10,000 Min.

6	SPRING PLATED	2	PHOSPHOR BRONZE	Natural
5	CONTACT CLIP	1	PHOSPHOR BRONZE	Ag-Plated
4	TERMINAL	6	BRASS	Ag-Plated
3	BASE	1	PHENOL IC RESIN	Natural
2	FRAME	1	SPCC	Ni-Plated
1	KNOB	1	PA66	Black
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

						 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP.						
						TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 Above 5 ~ 15 Above 15 ~ 30 Above 30 ~ 50 Angel's	±0.2 ±0.3 ±0.4 ±0.5 ±0.3°	3RD. ANGEL'S		UNITS	MM
ITEM NO.	DESCRIPTION	DRAWN	DATE									

DRAWN BY:		DATE	MATERIAL		REMARK	
Jack Lu		07/16/25	MAT'L		TITLE SWITCH	
CHECKED BY:		DATE	MODLE		SLIDE SWITCH	
Jacky Chen		07/16/25	FINISH			
APPROVED BY:		DATE	SCALE	1 : 1	DWG NO.	SS-14D01-GCx-S191
Tony Kao		07/16/25	SHEET NO.	1 of 1	PART NO.	SS-14D01-GCx-S191