

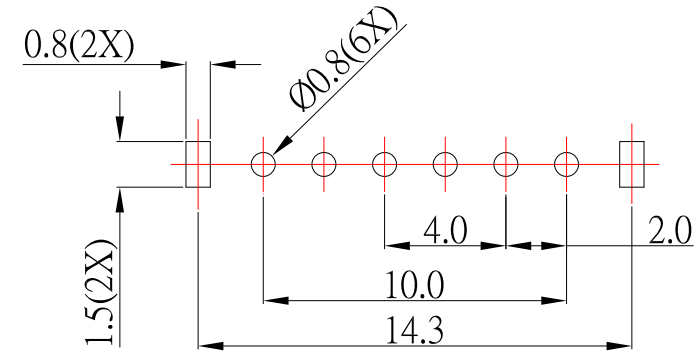


SCHEMATIC (SHORTING)

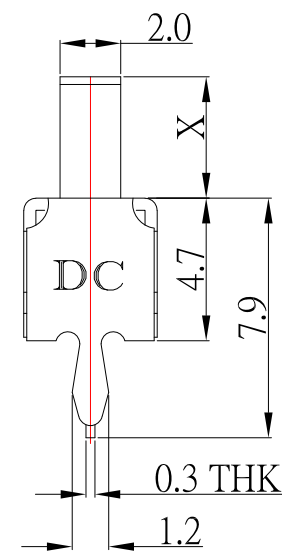

PCB LAYOUT

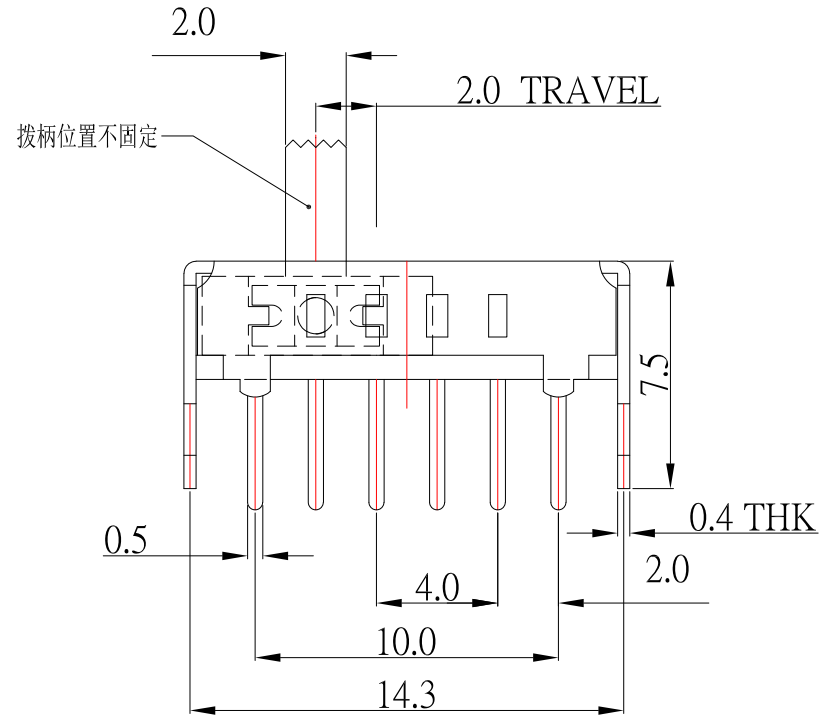

SPECIFICATIONS

Model No.	X(mm)
SS-14D01-GC2	2mm
SS-14D01-GC3	3mm
SS-14D01-GC4	4mm
SS-14D01-GC5	5mm
SS-14D01-GC6	6mm
SS-14D01-GC7	7mm
SS-14D01-GC8	8mm
SS-14D01-GC9	9mm

Rating	DC 50V 0.3A
Circuit	1P - 4T
Timing	Shorting
Contact Resistance	50mΩ Max.
Insulation Resistance	100MΩ Min.
Operating Force	300gf ±100gf
Operating Life (cycle)	10,000 Min.

6	SPRING PLATED	2	PHOSPHOR BRONZE	Natural
5	CONTACT CLIP	1	PHOSPHOR BRONZE	Ag-Plated
4	TERMINAL	6	BRASS	Ag-Plated
3	BASE	1	PHENOL IC RESIN	Natural
2	FRAME	1	SPCC	Ni-Plated
1	KNOB	1	PA66	Black
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

ITEM NO.

DESCRIPTION

DRAWN

DATE

CONTACT

建倚科技股份有限公司

CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD. ANGEL'S

UNITS

MM

DRAWN BY: Jack Lu

CHECKED BY: Jacky Chen

APPROVED BY: Tony Kao

DATE 07/16/25

DATE 07/16/25

DATE 07/16/25

MAT'L

FINISH

SCALE 1 : 1

SHEET NO. 1 of 1

TITLE SWITCH

MODLE

DWG NO. SS-14D01-GC_x-S191

PART NO. SS-14D01-GC_x-S191

SIZE A4

VER R