

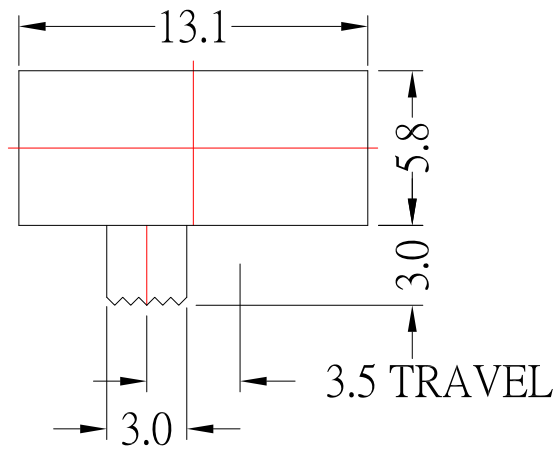
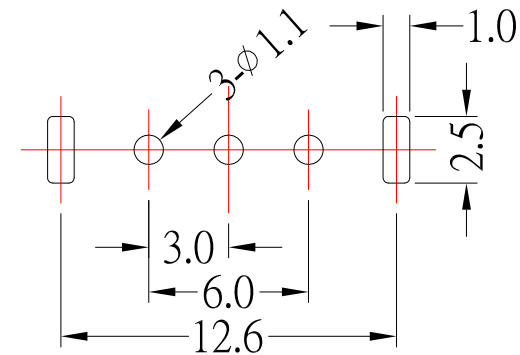


SCHEMATIC

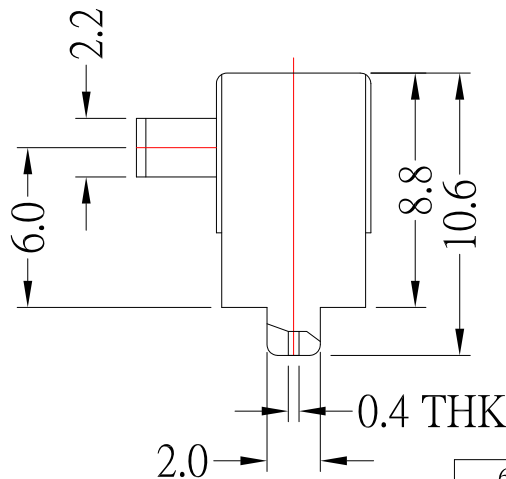

P.C.B LAYOUT
TOP VIEW

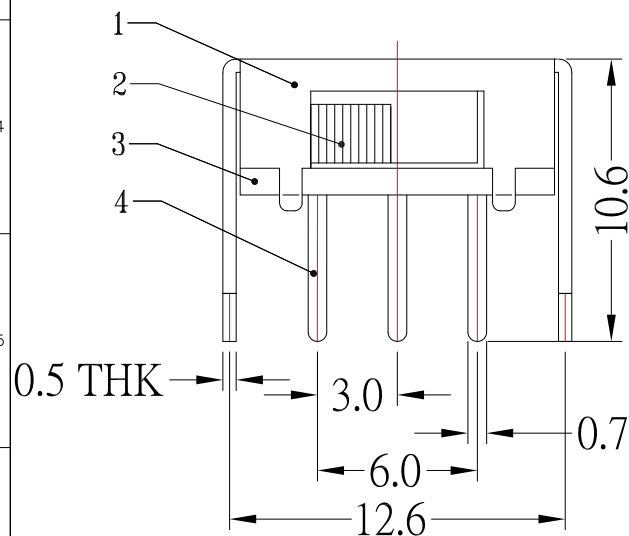

SPECIFICATIONS

Rating	DC 12V , 2.0A
Circuit	1P - 2T
Contact Resistance	200mΩ Max.
Insulation Resistance	100MΩ Min.
Operating Force	250gf ± 100gf
Operating Life (cycles)	10,000

6	SPRING	1	STAINLESS	Natural
5	CONTACT	1	BRASS	Ag-Plated
4	TERMINAL	3	BRASS	Ag-Plated
3	BASE	1	PHENOLIC RESIN	Natural
2	KNOB	1	PPA	Black
1	FRAME	1	SPCC	Ni-Plated
NO.	DESCRIPTION	QTY	MATERIAL	REMARK



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE

Jack Lu 11/22/23

CHECKED BY: DATE

Jacky Chen 11/22/23

APPROVED BY: DATE

Tony Kao 11/22/23

MATL

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

SWITCH

SLIDE SWITCH 1P2T SMT TYPE

SK-12F60S-GA3-S191

SK-12F60S-GA3-S191

SIZE

A4

VER

R1