

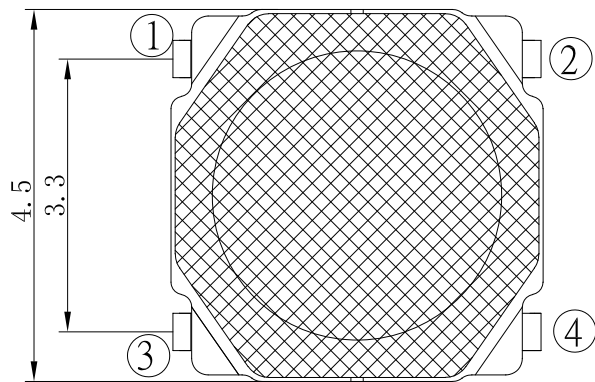
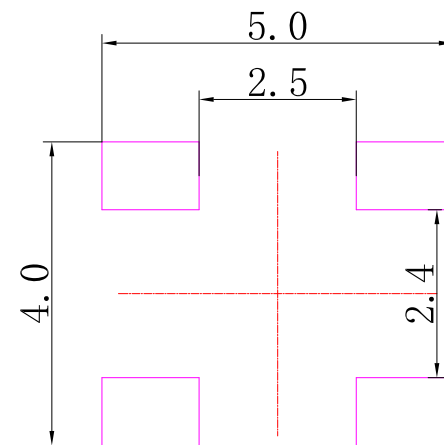


CIRCUIT DIAGRAM

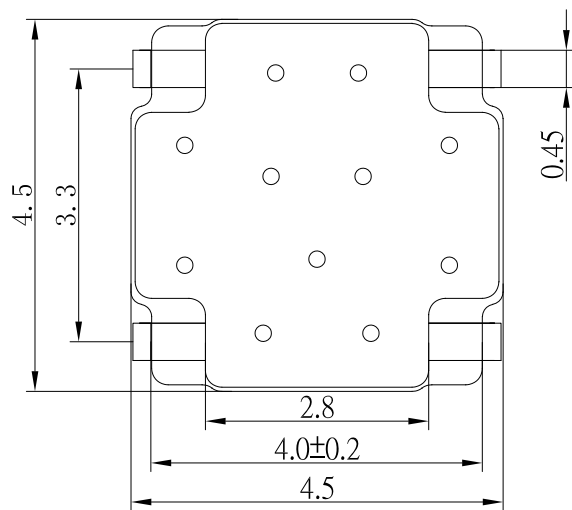

PCB LAYOUT

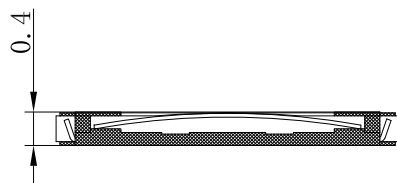

SPECIFICATIONS

Rating	DC 12V 50mA.					
Insulation Resistance	100 M Ω Min.					
Contact Resistance	100 m Ω Max.					
Dielectric Withstanding Voltage	AC 250V(20Hz) 1 min					
Travel	0.15 $\pm$ 0.05mm					
Operating Force	0	100 $\pm$ 30gf	2	160 $\pm$ 50gf	3	250 $\pm$ 50gf
Operating Life (cycles)	120,000		100,000		50,000	

D	FILM	1	Yellow	
C	CONTACT	1	SUS	
B	BASE	1	LCP	
A	TERMINAL	4	PHOSPHOR BRONZE	Ag Plated
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

1	新增Travel	Jack	030725
ITEM NO.	DESCRIPTION	DRAWN	DATE

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 $\pm$ 0.2 Above 5 ~ 15 $\pm$ 0.3 Above 15 ~ 30 $\pm$ 0.4 Above 30 ~ 50 $\pm$ 0.5 Angle $\pm$ 0.3°	3RD. ANGEL'S		UNITS	MM
-------------------------------------	---	--------------	--	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	03/07/25			
CHECKED BY:	DATE	FINISH	MODLE	TACT SWITCH
Jacky Chen	03/07/25			
APPROVED BY:	DATE	SCALE	DWG NO.	TS-A95-x-S410
Tony Kao	03/07/25	1 : 1		
		SHEET NO.	PART NO.	TS-A95-x-S410
		1 of 1		
				SIZE A4
				VER R1