

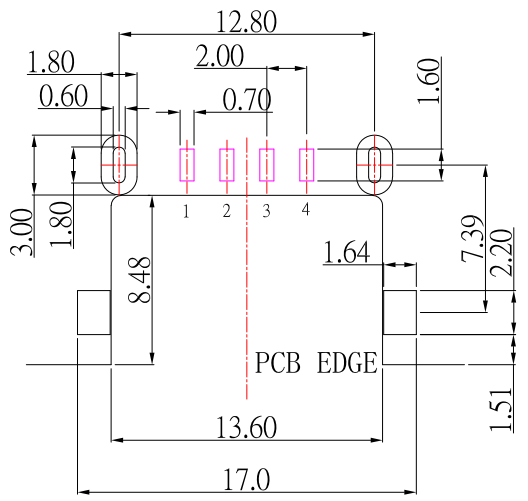
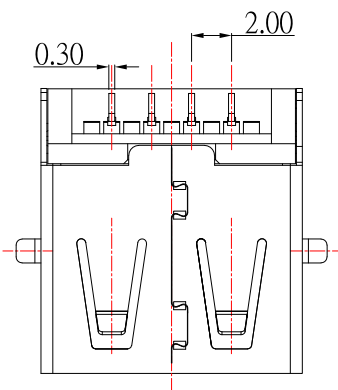


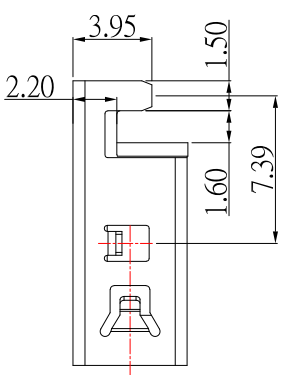


SUA-110E33A-x-S236

COLOR :

Black: B
White : W

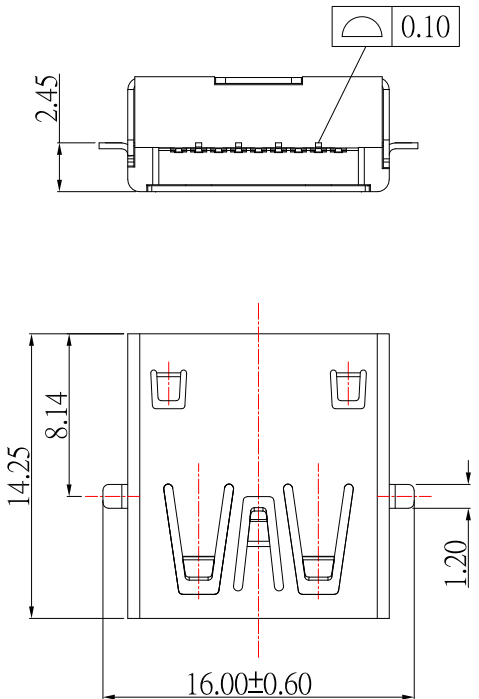

P.C.B LAYOUT

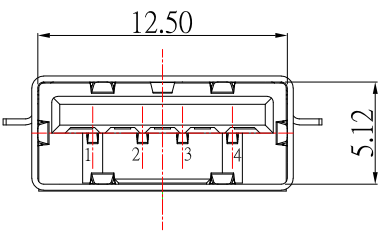

SPECIFICATIONS

Electrical:

- 1.Rating: 30V DC , 1.5A
- 1.Contact Resistance: 30 mΩ Max
- 2.Dielectric Withstanding Voltage: 500 V AC
- 3.Insulation Resistance: 1000 MΩ Min

Material:

- 1.Housing: LCP
- 2.Contact: Phosphor Bronze
- 3.Shell: SUS

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

Pin Number	Signal Name
1	VBUS
2	D-
3	D+
4	GND

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	更新尺寸和公差	Jack	120325
1	更新尺寸和樣式	Jack	112525




建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	12/03/25			
CHECKED BY:	DATE	FINISH	MODLE	USB AF 沉板 板上高H3.95MM 無捲邊 DIP 腳 外殼腳距7.39mm
Jacky Chen	12/03/25			
APPROVED BY:	DATE	SCALE	DWG NO.	SUA-110E33A-x-S236
Tony Kao	12/03/25	1 : 1		
		SHEET NO.	PART NO.	SUA-110E33A-x-S236
		1 of 1		
				SIZE A4
				VER R2