

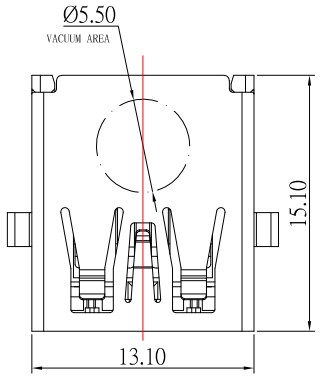





SUA-110E25-30x-S277


鍍層厚度：


Blank : 1u"
2 : 15u"
3 : 30u"

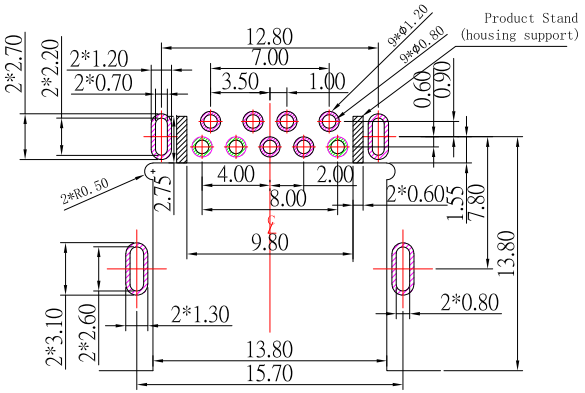

PCB LAYOUT

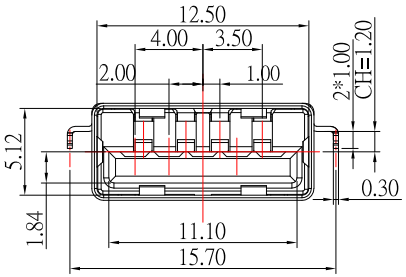


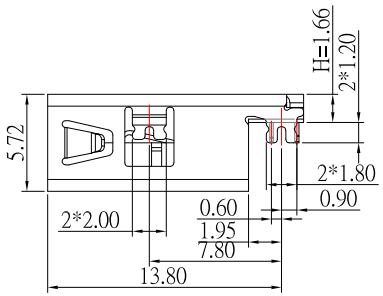




PIN ASSIGNMENTS

Pin #	SIGNAL NAME	DESCRIPTION	MATING SEQUENCE
1	VBUS	POWER	SECOND
2	D−	USB 2.0 DIFFERENTIAL PAIR	THIRD
3	D+		
4	GND	GROUND FOR POWER RETURN	SECOND
5	StdA_SSRX−	SUPERSPEED RECEIVER DIFFERENTIAL PAIR	LAST
6	StdA_SSRX+		
7	GND_DRAIN	GROUND FOR SIGNAL RETURN	
8	StdA_SSTX−	SUPERSPEED TRANSMITTER DIFFERENTIAL PAIR	
9	StdA_SSTX+		
Shell	Shield	CONNECTOR METAL SHELL	FRIST

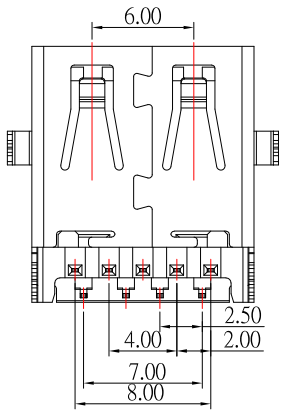

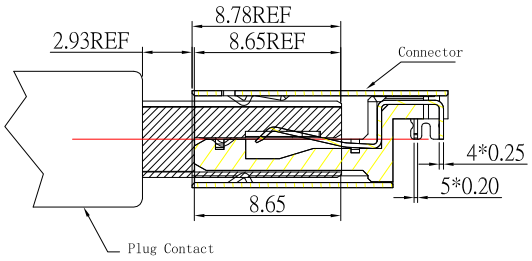

NOTE:

1.MATERIAL:

1.1 Housing: LCP

1.2 Contact: 4 PIN-Phosphor Bronze
5 PIN-Brass

1.3 Shell: SUS

2.Finish:

2.1 Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall

2.2 Shell: Nickel under Plated surface layer

3.SPECIFICATION:

3.1 Rate: 30V DC , 1.8 A

3.2 insulator Resistance:100MΩ Min

3.3 Dielectric Strength: 100V AC

3.4 Contact Resistance: 50mΩ Max

3.5 Operation Temperature: -40˚C ~ +85˚C

3.6 Insertion Force: 35 N Max

3.7 Extraction Force: 10 N Min

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新尺寸	Jack	050826

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S | UNITS | MM

DRAWN BY: Jack Lu	DATE 05/08/26	MAT'L	
CHECKED BY: Jacky Chen	DATE 05/08/26	FINISH	
APPROVED BY: Tony Kao	DATE 05/08/26	SCALE	1 : 1
		SHEET NO.	1 of 1

TITLE	CONNECTOR		
MODLE	USB AF 3.0反向 無捲邊 DIP 沉板，板上H1.66mm L15.10		
DWG NO.	SUA-110E25-30x-S277	SIZE	A4
PART NO.	SUA-110E25-30x-S277	VER	R1