



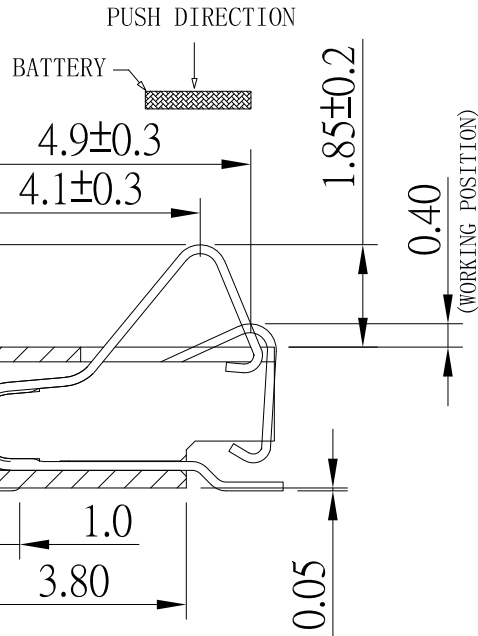



BC-35xx0-2P-S505

| PART NO. | DIM A | DIM B    |
|----------|-------|----------|
| 24       | 2.4   | 4.30±0.2 |
| 30       | 3.0   | 4.90±0.2 |
| 35       | 3.5   | 5.40±0.2 |

此固定片仅用于固定产品，  
请勿连接电路。

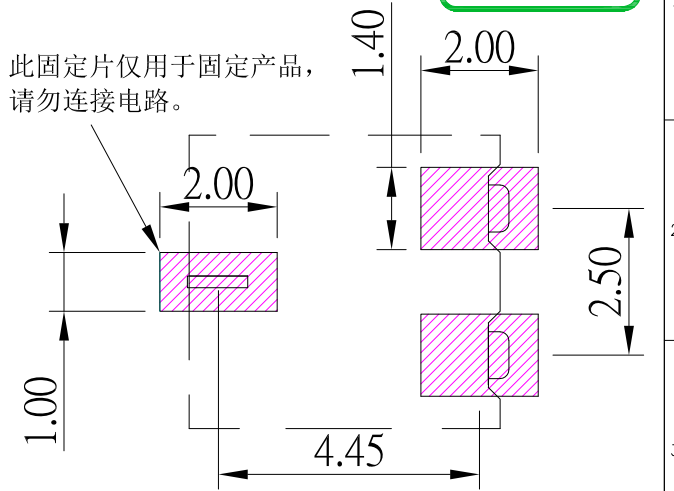

P.C.B LAYOUT  
TOP VIEW

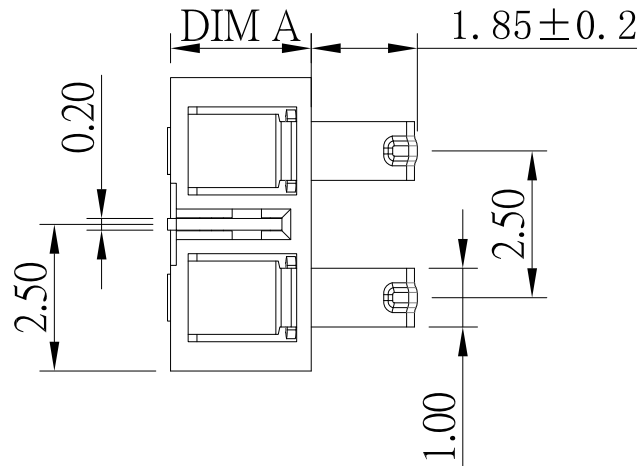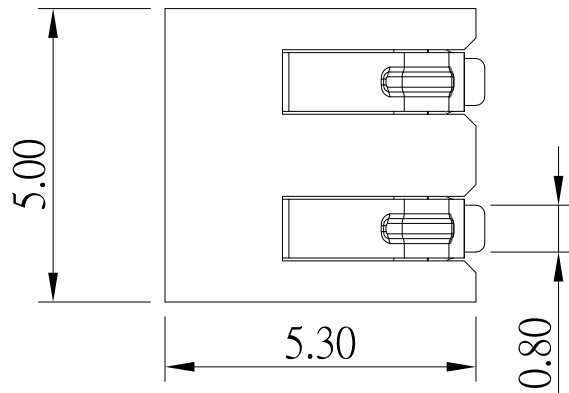

MATERIAL:

1. INSULATOR : LCP
  2. CONTACT : PHOSPHOR BRONZE, GOLD PLATED OVER NICKEL
- SPECIFICATION:
1. RATING : 12.0 , 2.0A
  2. CONTACT RESISTANCE : 30mΩ
  3. INSULATION RESISTANCE : 500MΩ Min
  4. DIELECTRIC VOLTAGE : 500V
  5. OPERATING TEMPERATURE : -40° C ~ 85° C

**CONTACT** 建倚科技股份有限公司  
**CONTACT TECHNOLOGY CORP.**

TOLERANCE UNLESS OTHERWISE STATED :

|               |      |                 |       |    |
|---------------|------|-----------------|-------|----|
| Up to 5       | ±0.2 | 3RD.<br>ANGEL'S | UNITS | MM |
| Above 5 ~ 15  | ±0.3 |                 |       |    |
| Above 15 ~ 30 | ±0.4 |                 |       |    |
| Above 30 ~ 50 | ±0.5 |                 |       |    |
| Angle         | ±0.3 |                 |       |    |

DRAWN BY: Jack Lu  
DATE: 08/06/26

CHECKED BY: Jacky Chen  
DATE: 08/06/26

APPROVED BY: Tony Kao  
DATE: 08/06/26

|           |        |          |                   |
|-----------|--------|----------|-------------------|
| MAT'L     |        | TITLE    | CONNECTOR         |
| FINISH    |        | MODLE    | BATTERY CONNECTOR |
| SCALE     | 1 : 1  | DWG NO.  | BC-35xx0-2P-S505  |
| SHEET NO. | 1 of 1 | PART NO. | BC-35xx0-2P-S505  |

| ITEM NO. | DESCRIPTION | DRAWN | DATE |
|----------|-------------|-------|------|
|----------|-------------|-------|------|