



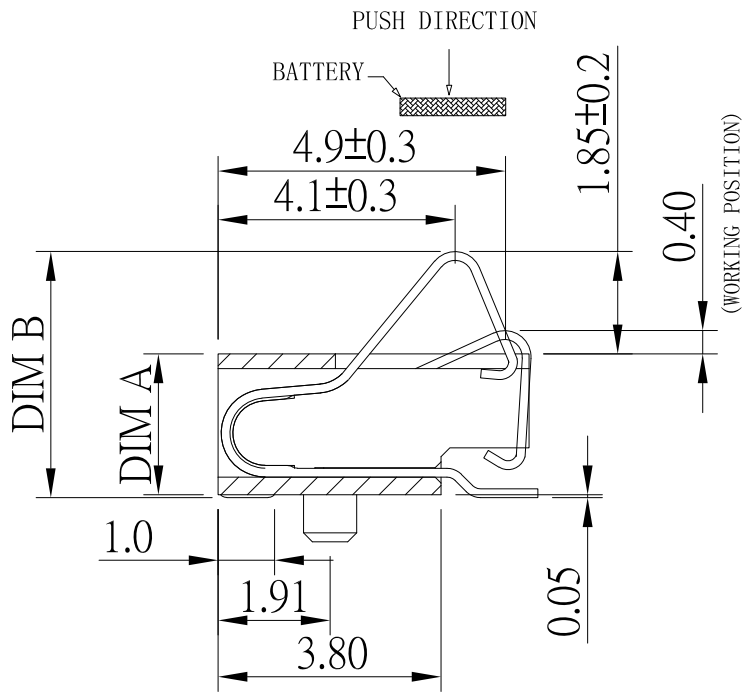


BC-35xx0E-2P-S505

PART NO.	DIM A	DIM B
24	2.4	4.30±0.2
30	3.0	4.90±0.2
35	3.5	5.40±0.2

此固定片仅用于固定产品，
请勿连接电路。

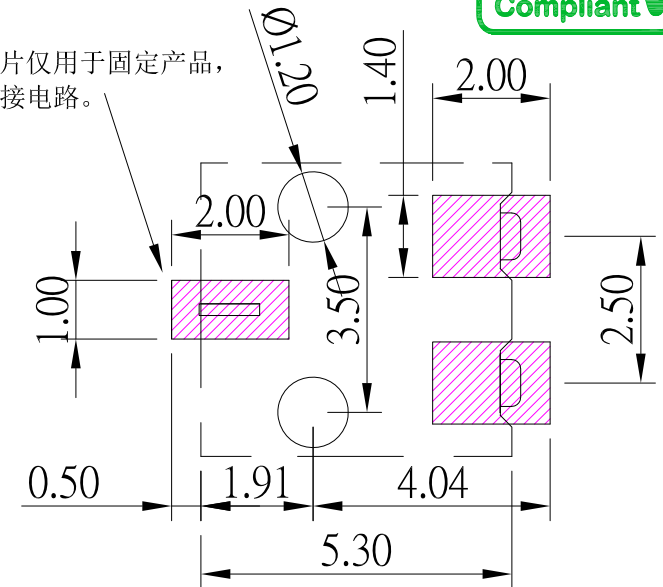

P.C.B LAYOUT
TOP VIEW

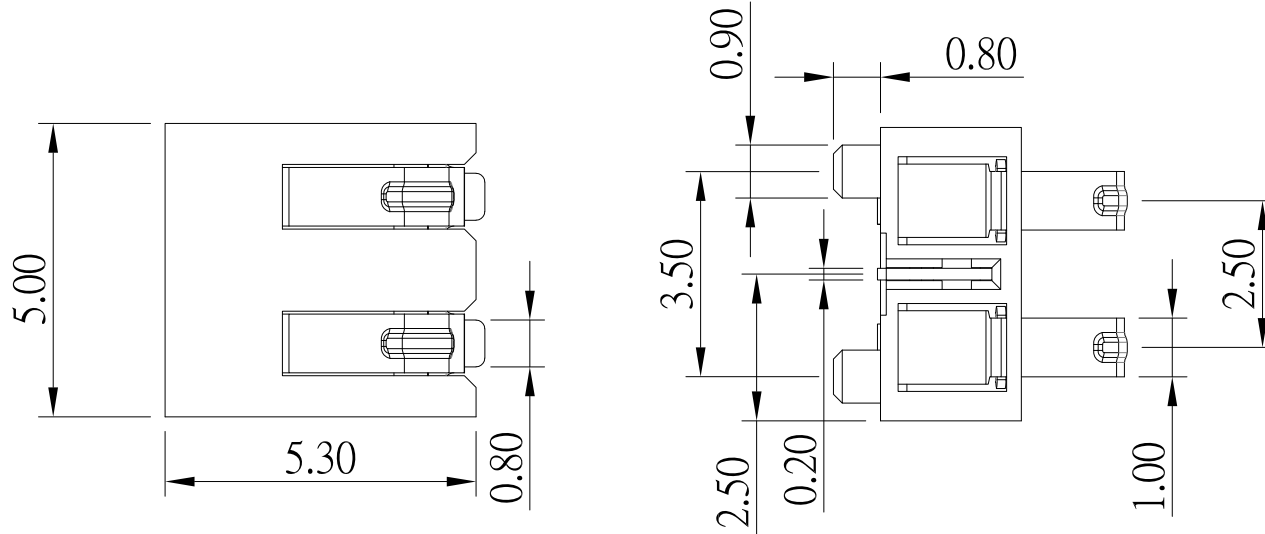

MATERIAL:

1. INSULATOR : LCP
 2. CONTACT : PHOSPHOR BRONZE, GOLD PLATED OVER NICKEL
- SPECIFICATION:

1. RATING : 12.0 , 2.0A
2. CONTACT RESISTANCE : 30mΩ
3. INSULATION RESISTANCE : 500MΩ Min
4. DIELECTRIC VOLTAGE : 500V
5. OPERATING TEMPERATURE : -40° C ~ 85° C

ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 Above 5 ~ 15 Above 15 ~ 30 Above 30 ~ 50 Angle	±0.2 ±0.3 ±0.4 ±0.5 ±0.3	3RD. ANGEL'S	UNITS	MM
-------------------------------------	--	--------------------------------------	-----------------	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	08/06/26	FINISH	MODLE	BATTERY CONNECTOR 帶定位柱
CHECKED BY:	DATE	SCALE	DWG NO.	SIZE
Jacky Chen	08/06/26	1 : 1	BC-35xx0E-2P-S505	A4
APPROVED BY:	DATE	SHEET NO.	PART NO.	VER
Tony Kao	08/06/26	1 of 1	BC-35xx0E-2P-S505	R