
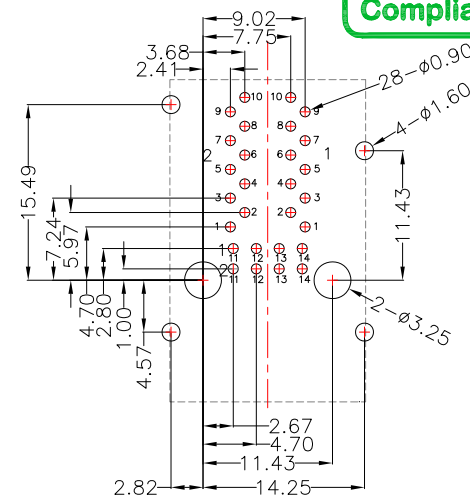
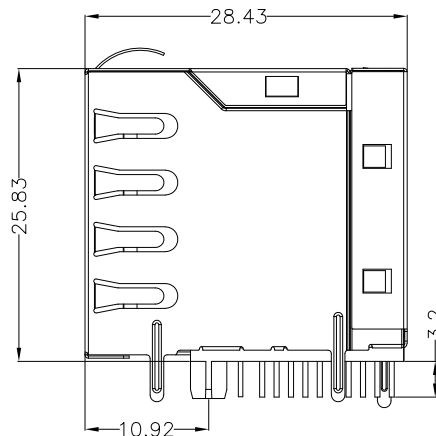


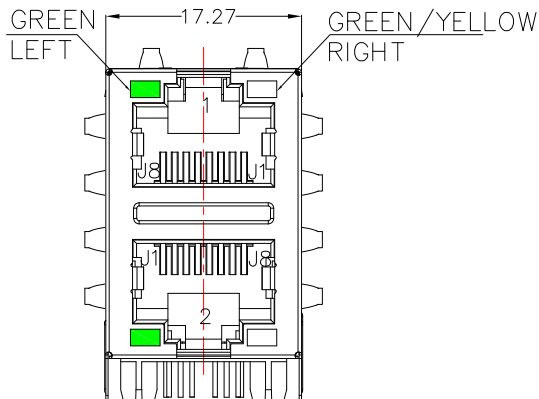

PCB LAYOUT

LED Specification



Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	565nm	20mA	2.2-2.4V
Yellow	590nm	20mA	2.1-2.5V

Material:


- 1.Housing : PA66,Black
- 2.Contact : Phosphor Brzonze , Gold Plating over Nickel
- 3.Shield : Brass , Nickel Plated
- 4.Terminal Bracket : PBT,Black

Environmental:

- 1.Operation Temperature : -40°C ~ +85°C
- 2.Storage Temperature : -40°C ~ +85°C

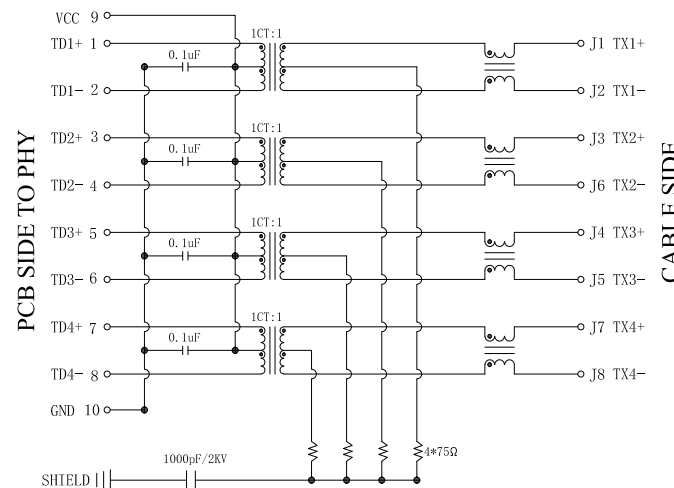

SCHEMATIC

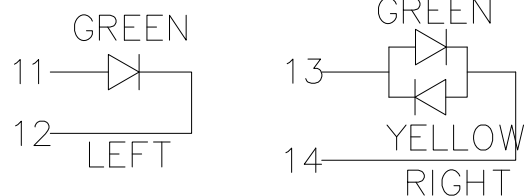

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 02/11/25

CHECKED BY: Jacky Chen
DATE: 02/11/25

APPROVED BY: Tony Kao
DATE: 02/11/25

MAT'L	TITLE	RJ45
FINISH	MODLE	RJ45 2X1 1000BASE WITH LED
SCALE	DWG NO.	MJ45-21Q04D-GGY-S473
SHEET NO.	PART NO.	MJ45-21Q04D-GGY-S473

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------