

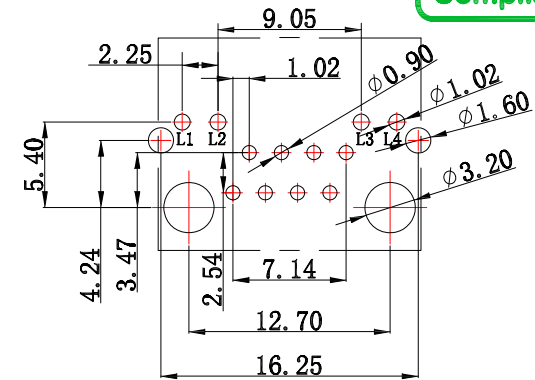
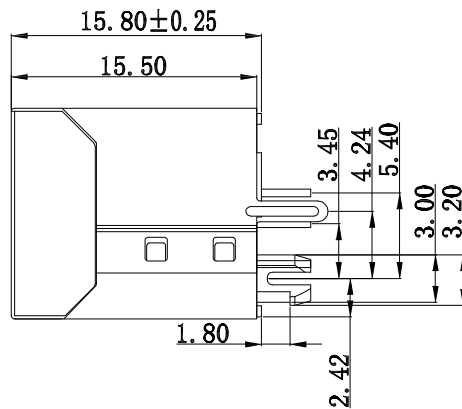


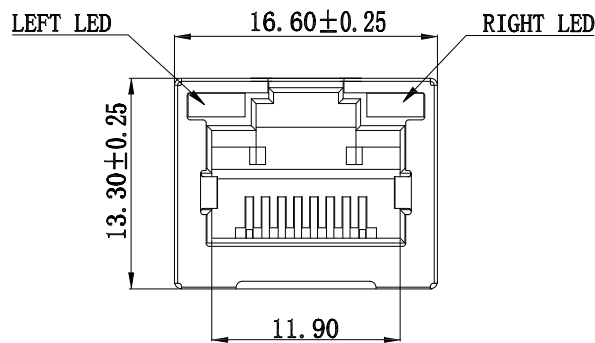

PCB LAYOUT
TOP VIEW

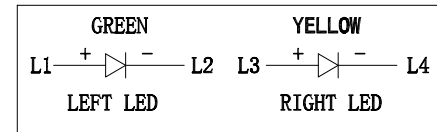

RJ45-52T811EGYx-S307

鍍層厚度:

Blank : 1u"
1 : 3u"
2 : 15u"
3 : 30u"
5 : 6u"

SPECIFICATIONS

Electrical:

- 1.Voltage Rating : 125 VAC RMS
- 2.Current Rating : 1.5 A
- 3.Contact Resistance : 30 mΩ MAX
- 4.Insulation Resistance : 1000 MΩ MIN
- 5.Dielectric Strength : 1000V AC OR 1500V DC RMS AT 0.5mA

Material:

- 1.Housing : PBT,Black
- 2.Contact : Phosphor Bronze , Gold Plating over Nickel
- 3.Insert : PBT,Black
- 4.Shield : Brass , Nickel Plated

Environmental:

- 1.Operation Temperature : -40°C ~ +85°C

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 08/20/25
DATE: 08/20/25
DATE: 08/20/25

MAT'L		TITLE	RJ45	
FINISH		MODLE	RJ45 8P8C屏蔽無邊 WITH LED	
SCALE	1 : 1	DWG NO.	RJ45-52T811EGYx-S307	SIZE A4
SHEET NO.	1 of 1	PART NO.	RJ45-52T811EGYx-S307	VER R

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------