

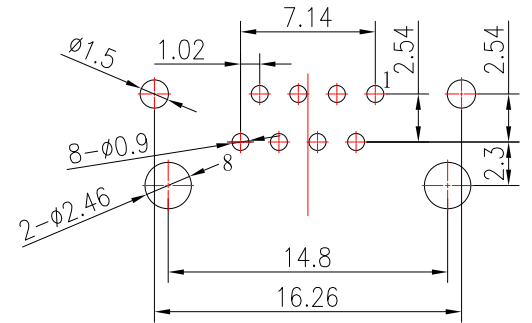
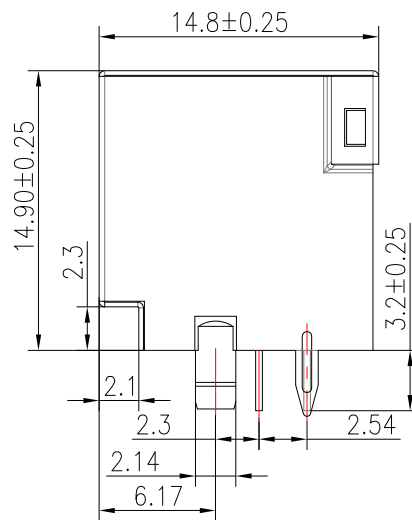


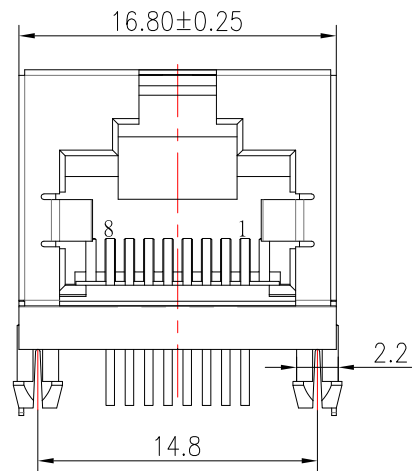

PCB LAYOUT

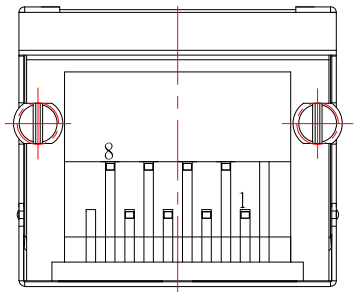

RJ45-55T811E-x-S307

鍍層厚度：

Blank : 1u"
1 : 3u"
2 : 15u"
3 : 30u"
5 : 6u"

SPECIFICATIONS

Electrical:

- 1.Voltage Rating : 125 VAC RMS
- 2.Current Rating : 1.5 AMP
- 3.Contact Resistance : 30 mΩ MAX
- 4.Insulation Resistance : 1000 MΩ MIN
- 5.Dielectric Strength : AC 1000 V RMS 50Hz 1 MIN

Environmental:

- 1.Operation Temperature : -40°C ~ +85°C
- 2.Storage Temperature : -40°C ~ +85°C

Material:

- 1.Housing : PBT,Black
- 2.Insert : PBT,Black
- 3.Contact : Phosphor Bronze , Gold Plating over Nickel
- 4.Shield : Brass , Nickel Plating

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

DATE

Jack Lu

10/09/25

CHECKED BY:

DATE

Jacky Chen

10/09/25

APPROVED BY:

DATE

Tony Kao

10/09/25

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

RJ45

RJ45 8P8C 屏蔽無邊 無燈

RJ45-55T811E-x-S307

RJ45-55T811E-x-S307

SIZE

A4

VER

R

ITEM NO. DESCRIPTION DRAWN DATE

A B I

C D E I F

G H I I I I J