
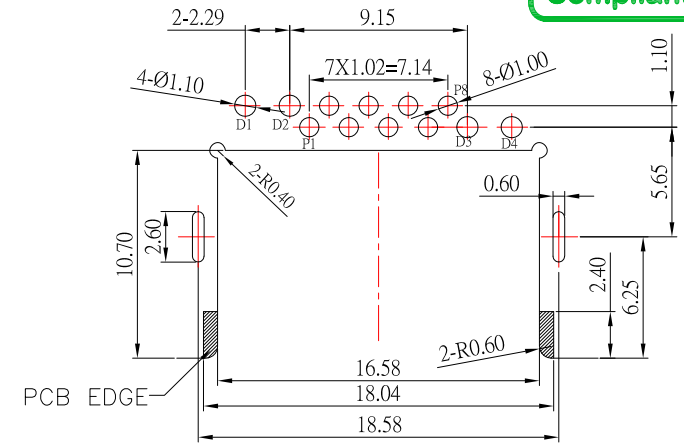
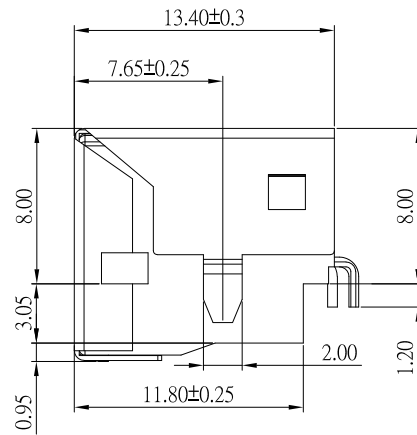


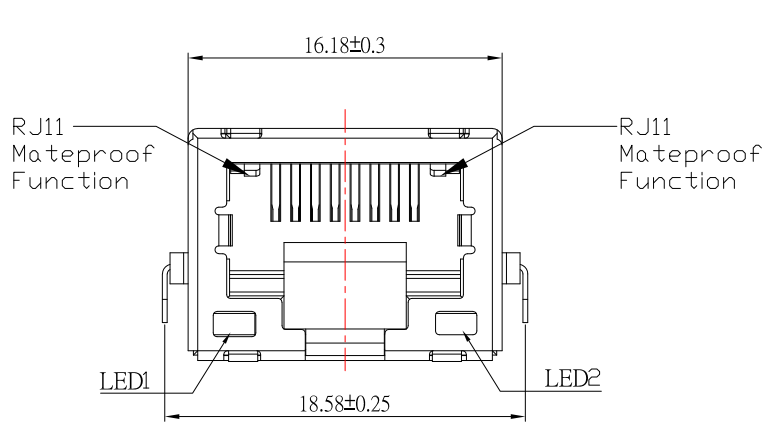

PCB LAYOUT

SPECIFICATIONS

Electrical:


- 1.Voltage Rating : 150 V
- 2.Current Rating : 1.5 A
- 3.Contact Resistance : 40 mΩ MAX
- 4.Insulation Resistance : 100 MΩ MIN.
- 5.Dielectric Strength : 750V AC

Material:


- 1.Housing : LCP,Black
- 2.Contact : Phosphor Bronze , Gold Plating over Nickel
- 3.Shield : SUS , Nickel Plated

Environmental:

- 1.Operation Temperature : -30°C ~ +70°C

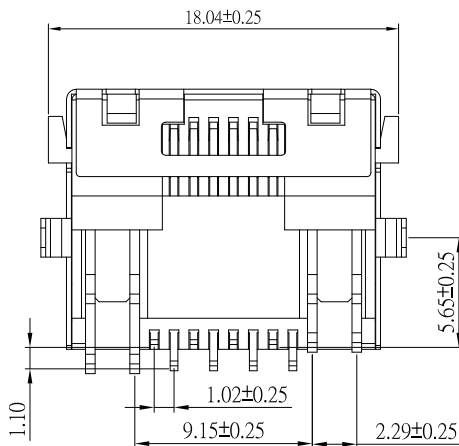

LED DISPLAY

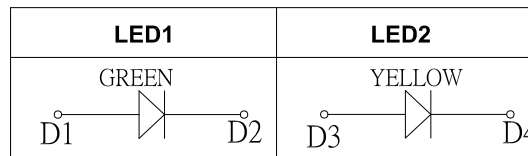

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

11/12/25

CHECKED BY:

Jacky Chen

DATE

11/12/25

APPROVED BY:

Tony Kao

DATE

11/12/25

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

RJ45

RJ45 8P8C 1X1 WITH LED

RJ45-K3J1-GY-S492

RJ45-K3J1-GY-S492

SIZE

A4

VER

R

ITEM NO. DESCRIPTION DRAWN DATE