

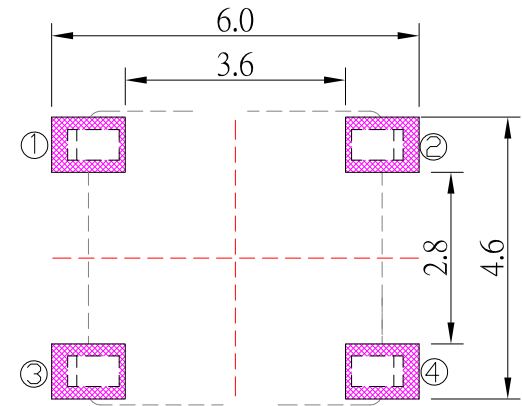
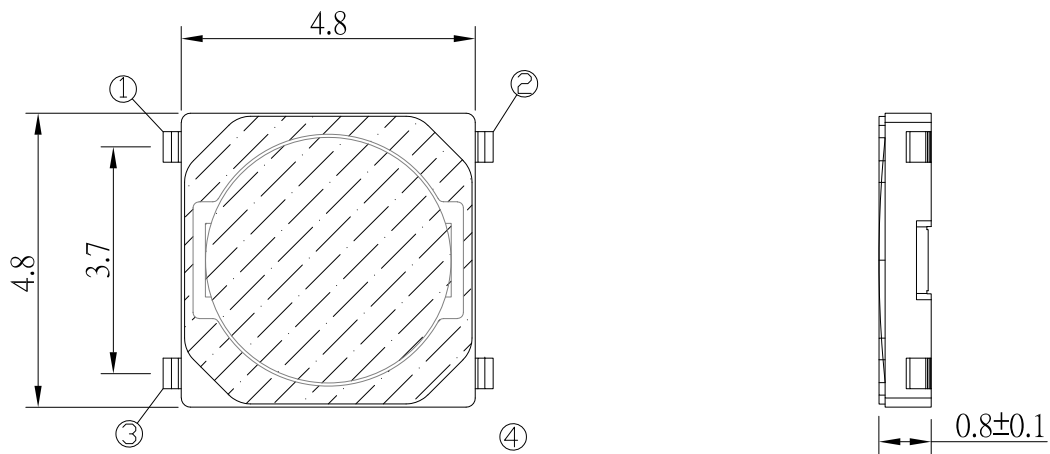




P.C.B LAYOUT

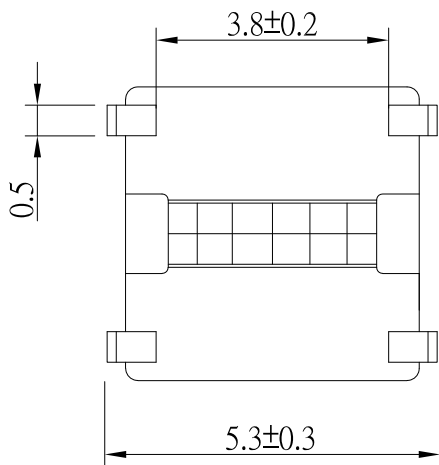

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	50mA , 12V DC		
Insulation Resistance	10M Ω Min.		
Dielectric Withstanding Voltage	AC 250 V/ 1 min		
Contact Resistance	100m Ω Max.		
Travel	0.15 $\pm$ 0.10mm		
Operating Force	2 160 $\pm$ 50gf	3 260 $\pm$ 50gf	
Operating Life(cycles)	100,000		

D	DUSTPROOF FILM	1	PI	Yellow
C	CONTACT	1	SUS	Ag plated
B	CASE	1	PA9T(Black)	
A	THERMINAL	4	PHOSPHOR BRONZE	Ag plated
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
DRAWN BY:	DATE	MAT'L	TITLE SWITCH	
Jack Lu	07/15/26	FINISH	MODLE	TACT SWITCH
CHECKED BY:	DATE	SCALE	DWG NO.	SIZE
Jacky Chen	07/15/26	1 : 1	TS-A90M1PU-x-S410	A4
APPROVED BY:	DATE	SHEET NO.	PART NO.	VER
Tony Kao	07/15/26	1 of 1	TS-A90M1PU-x-S410	R1

				建倚科技股份有限公司				DRAWN BY: DATE				MAT'L				TITLE SWITCH			
				CONTACT 建倚科技股份有限公司				Jack Lu 07/15/26				FINISH				MODLE TACT SWITCH			
				CONTACT TECHNOLOGY CORP.				Jacky Chen 07/15/26				SCALE 1 : 1				DWG NO. TS-A90M1PU-x-S410			
								APPROVED BY: DATE				SHEET NO. 1 of 1				PART NO. TS-A90M1PU-x-S410			
								Tony Kao 07/15/26											
1	更新樣式	Jack	071526	TOLERANCE UNLESS OTHERWISE STATED :				3RD. ANGEL'S				UNITS MM							
ITEM NO.	DESCRIPTION	DRAWN	DATE	Up to 5 $\pm$ 0.2				Above 5 ~ 15 $\pm$ 0.3											
				Above 15 ~ 30 $\pm$ 0.4				Above 30 ~ 50 $\pm$ 0.5											
				Angle $\pm$ 0.3															