
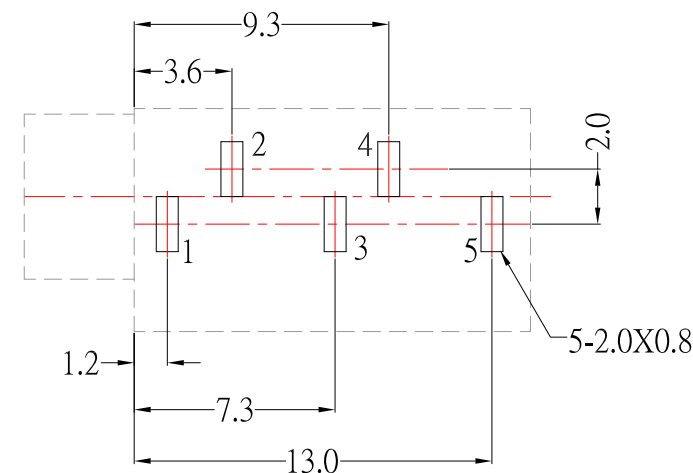
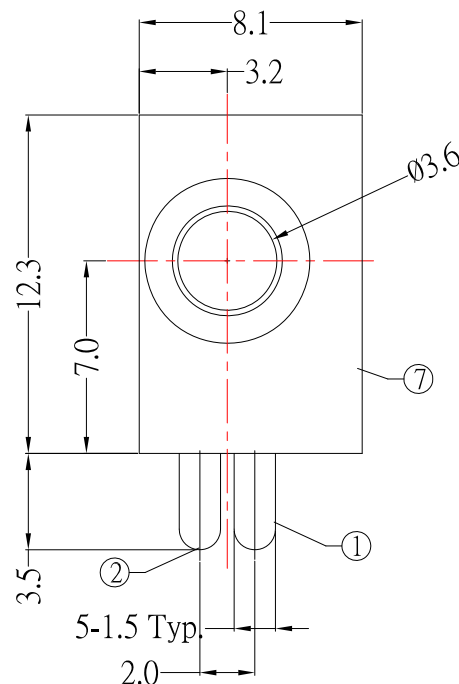


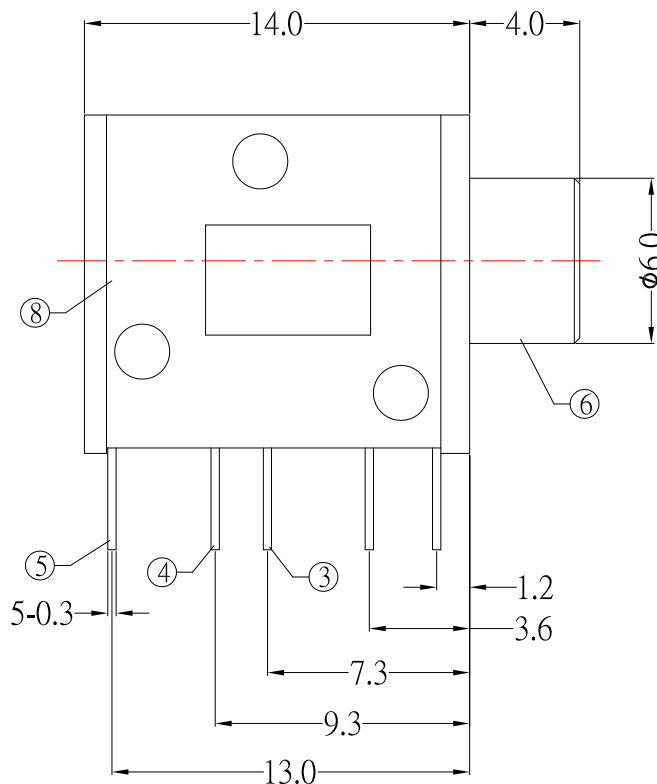

P.C.B LAYOUT
TOP VIEW

SPECIFICATIONS


- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : $\leq 0.03 \Omega$;
- 3.Insulation resistance : $\geq 100M \Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles .

SCHEMATIC

PJ-D3025	PJ-D3025-1	PJ-D3025-2	PJ-D3025-3	PJ-D3025-4

⑧	COVER	1	PBT	
⑦	HOUSING	1	PBT	
⑥	AXIS SUPPORT	1	BRASS	Ni-Plating
⑤	CURVE PIECE	1	BRASS	Sn-Plating
④	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
③	CURVE PIECE	1	BRASS	Sn-Plating
②	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
①	FLAT PIECE	1	BRASS	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

MAT'L		TITLE	JACK	
FINISH		MODLE	PHONE JACK	
SCALE	1 : 1	DWG NO.	PJ-D3025-S124	SIZE A4
SHEET NO.	1 of 1	PART NO.	PJ-D3025-S124	VER A0

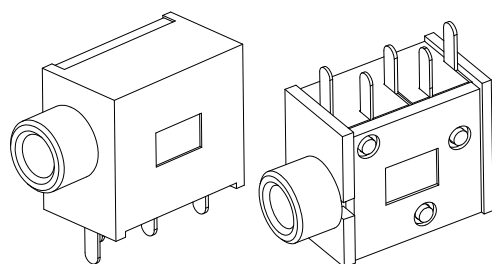

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu 10/05/16
CHECKED BY: Jacky Chen 10/05/16
APPROVED BY: Tony Kao 10/05/16

1	更新為A0版	Jack	100516
ITEM NO.	DESCRIPTION	DRAWN	DATE