



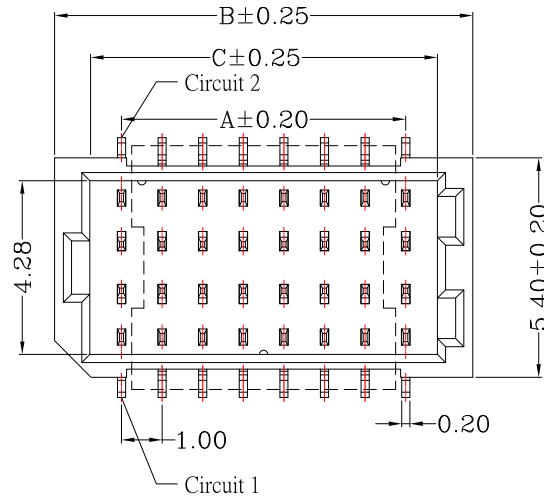

PART NO.	Dimensions		
	A	B	C
10	4.00	7.30	5.56
12	5.00	8.30	6.56
16	7.00	10.30	8.56
18	8.00	11.30	9.56
20	9.00	12.30	10.56
22	10.00	13.30	11.56
30	14.00	17.30	15.56
40	19.00	22.30	20.56
50	24.00	27.30	25.56

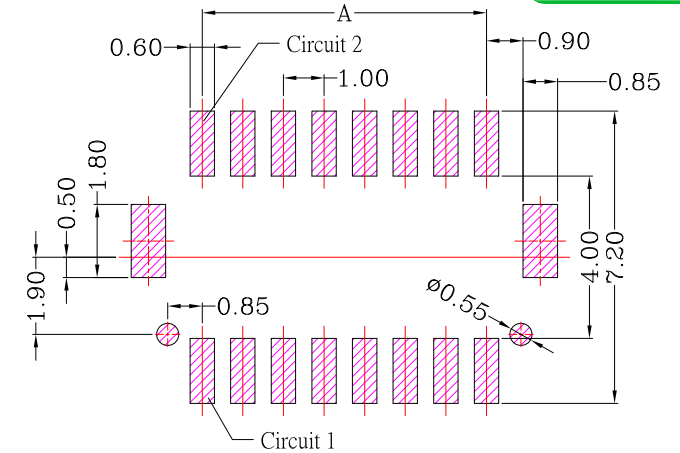

P.C.B LAYOUT

WF-1011AVS2E_{xx}-S304




雙排 總PIN數

MATERIAL:

1. HOUSING: LCP, NATURAL
2. CONTACT: PHOSPHOR BRONZE, GOLD PLATED OVER NICKEL
3. SOLDER TABS: PHOSPHOR BRONZE, GOLD PLATED OVER NICKEL

SPECIFICATION:

1. CURRENT RATING: 1.0A AC/DC
2. VOLTAGE RATING: 50V AC/DC
3. TEMPERATURE RANGE: -25°C ~ +85°C
4. CONTACT RESISTANCE: 20MΩ MAX.
5. INSULATION RESISTANCE: 100MΩ MIN.
6. WITHSTANDING VOLTAGE: 500V AC

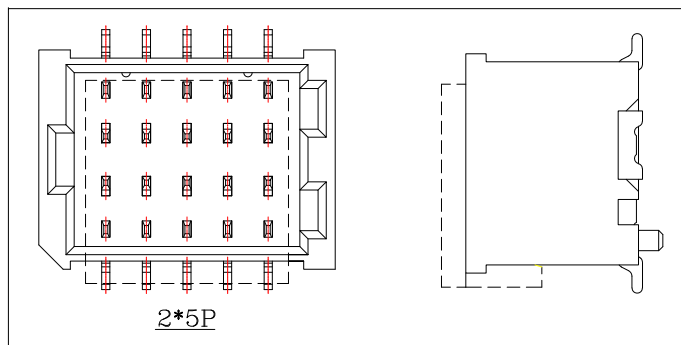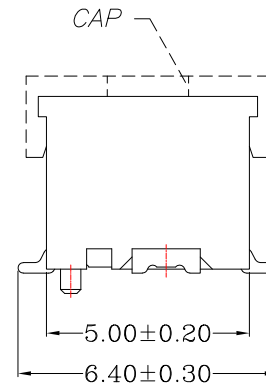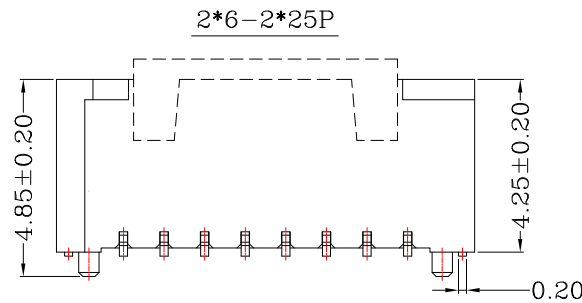

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

12/24/25

CHECKED BY:

Jacky Chen

DATE

12/24/25

APPROVED BY:

Tony Kao

DATE

12/24/25

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

WAFER 1.0 雙排 SMT 180度 帶定位柱

WF-1011AVS2E_{xx}-S304

WF-1011AVS2E_{xx}-S304

SIZE

A4

VER

R1

ITEM NO.

DESCRIPTION

DRAWN

DATE