

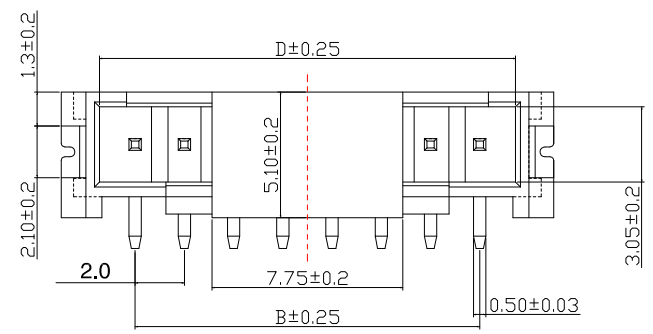
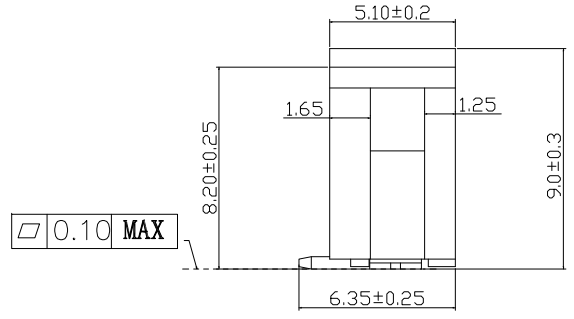


P.C.B LAYOUT

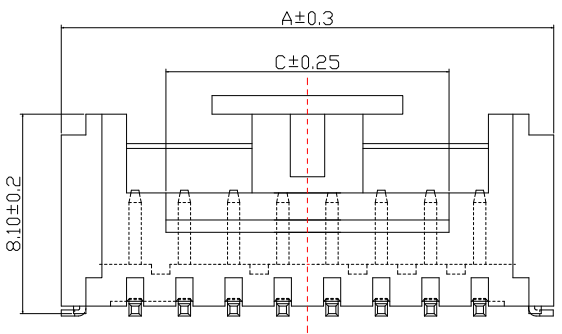

0.10 MAX

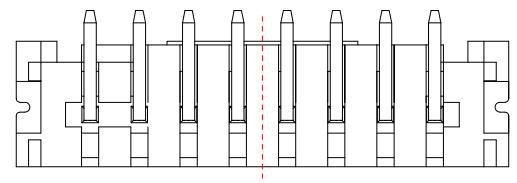

PART NO.	A-(mm)	B-(mm)	C-(mm)	D-(mm)
02	8.00	2.00	2.70	4.75
03	10.00	4.00	3.20	6.75
04	12.00	6.00	3.50	8.90
05	14.00	8.00	5.50	10.90
06	16.00	10.00	7.50	12.90
07	18.00	12.00	9.50	14.90
08	20.00	14.00	11.50	16.90
09	22.00	16.00	13.50	18.90
10	24.00	18.00	15.50	20.90
11	26.00	20.00	15.50	22.90
12	28.00	22.00	15.50	24.90

SPECIFICATIONS

- 1.Current rating : 1.0A AC , DC
 - 2.Voltage rating : 125V AC , DC
 - 3.Temperature rating : -40℃ ~ +85℃
 - 4.Insulation resistance : 100MΩ min.
 - 5.Withstand voltage : 500V AC/minute
 - 6.Contact resistance : 20mΩ/Max
- Material:
- 1.Housing : LCP
 - 2.Contact : Brass,Tin plated over Nickel
 - 3.Solder Tab : Brass,Tin plated over Nickel

ITEM NO.

DESCRIPTION

DRAWN

DATE

CONTACT

建倚科技股份有限公司

CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD. ANGEL'S

UNITS

MM

DRAWN BY: Jack Lu

CHECKED BY: Jacky Chen

APPROVED BY: Tony Kao

DATE: 01/08/26

DATE: 01/08/26

DATE: 01/08/26

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

WAFER P : 2.0mm SMT 180度 加CAP

WF-2003VSxxC-S246

WF-2003VSxxC-S246

SIZE

VER

R