
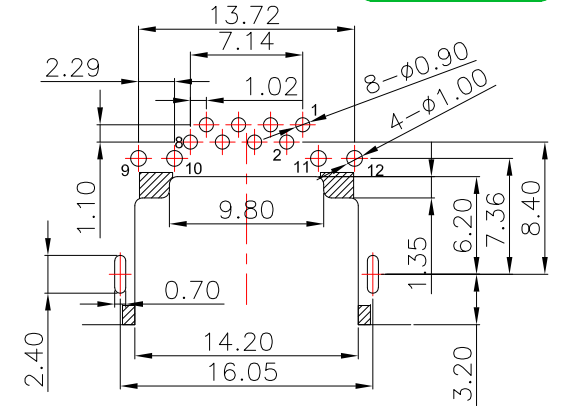
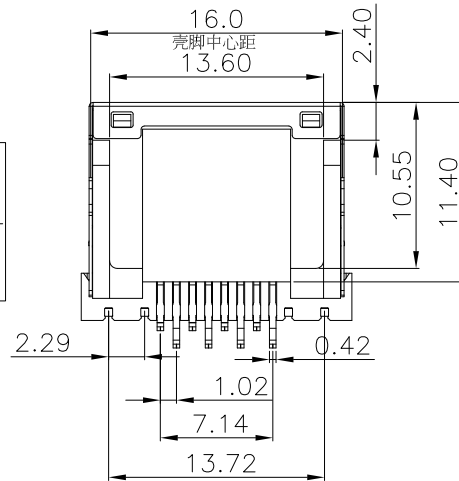
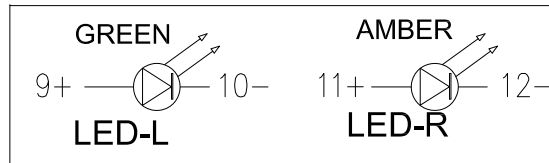
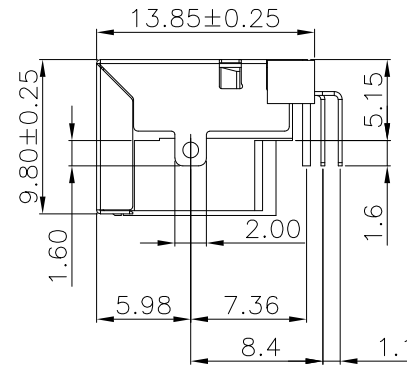
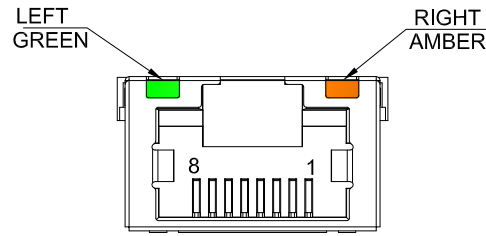



RJ45-58W811-GAx-S307

鍍層厚度：

Blank : 1u"
1 : 3u"
2 : 15u"
3 : 30u"
5 : 6u"



PCB LAYOUT

SPECIFICATIONS

Electrical:

- 1.Voltage Rating : 125 VAC RMS
- 2.Current Rating : 1.5 A
- 3.Contact Resistance : 40 mΩ MAX
- 4.Insulation Resistance : 500 MΩ MIN
- 5.Dielectric Strength : 500 VAC

MATERIAL

- 1.Housing : PA9T
- 2.Contact : Phosphor Bronze , Gold Plating over Nickel
- 3.Shield : SUS , Nickel Plated

Environmental:

- 1.Operation Temperature : -40°C ~ +85°C
- 2.Storage Temperature : -40°C ~ +85°C

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 05/21/26
DATE: 05/21/26
DATE: 05/21/26

MAT'L		TITLE	RJ45	
FINISH		MODLE	RJ45 8P8C 沉板式板上5.15 mm DIP屏蔽 带LED	
SCALE	1 : 1	DWG NO.	RJ45-58W811-GAx-S307	SIZE A4
SHEET NO.	1 of 1	PART NO.	RJ45-58W811-GAx-S307	VER R