


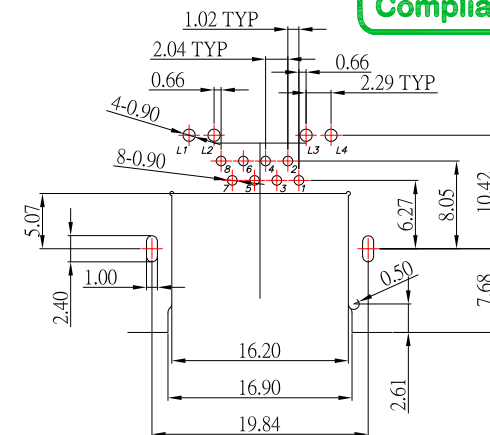
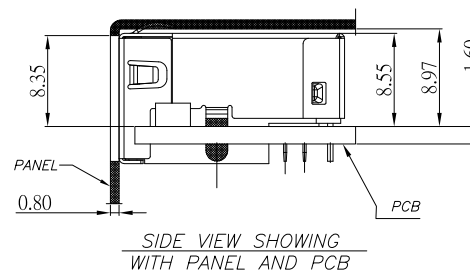


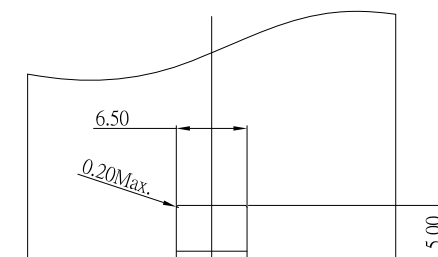



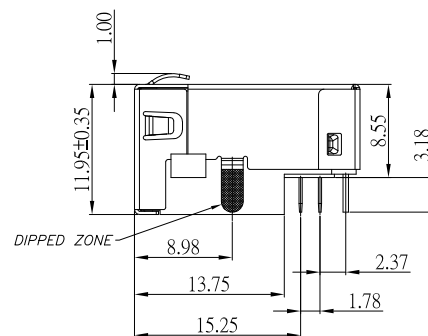

PCB LAYOUT



TOP VIEW

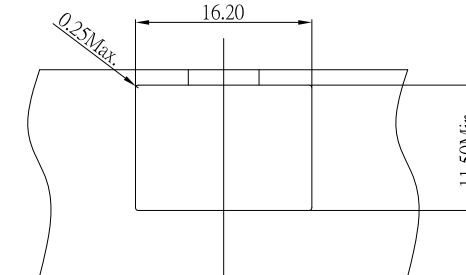

FRONT VIEW
RECOMMEND PANEL LAYOUT

SPECIFICATIONS

Electrical:


- 1.Voltage Rating : 125V AC
- 2.Current Rating : 1.25 A
- 3.Insulation Resistance : 500 MΩ MIN.
- 4.Dielectric Strength : 1000V AC

MATERIAL

- 1.Housing : LCP,Black
- 2.Contact : Phosphor Bronze , Gold Plating over Nickel
- 3.Shield : SUS , Tin Plated

Environmental:

- 1.Operation Temperature : -40°C ~ +85°C
- 2.Storage Temperature : -40°C ~ +85°C



CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 03/06/26
DATE: 03/06/26
DATE: 03/06/26

MAT'L
FINISH
SCALE
SHEET NO.

1 : 1
1 of 1

TITLE
MODLE
DWG NO.
PART NO.

RJ45
RJ45 CAT6A 8P8C 1X1 WITH LED
RJ45-KK370A-GY-S492
RJ45-KK370A-GY-S492

SIZE
A4
VER
R

ITEM NO. DESCRIPTION DRAWN DATE