


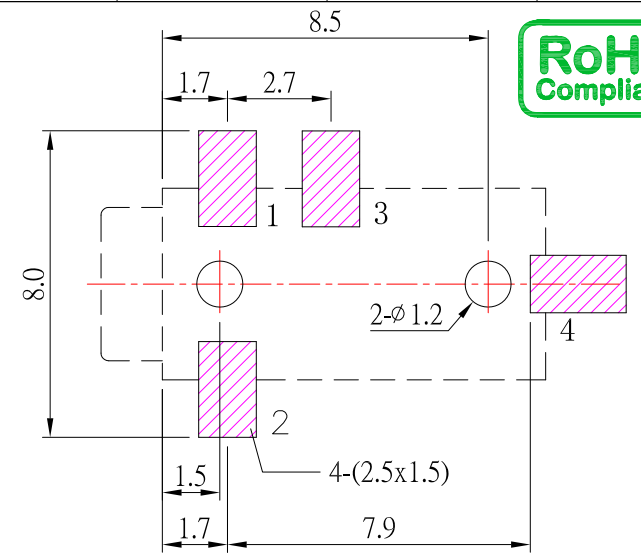
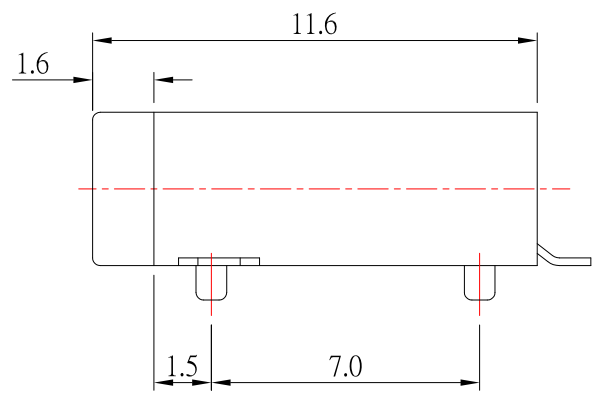


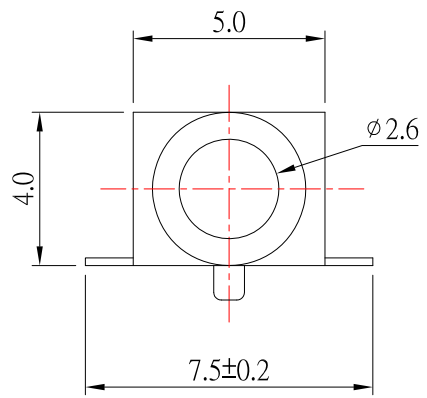


P.C.B LAYOUT
TOP VIEW

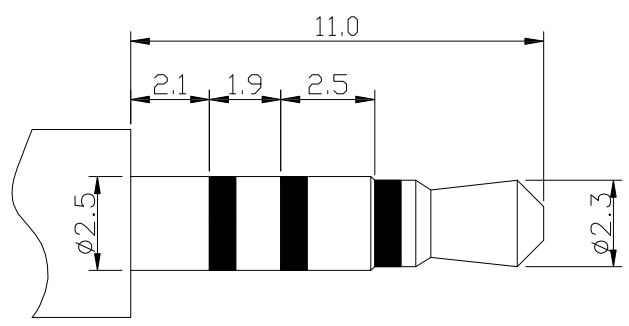

ø2.50mm 4 POLE PLUG

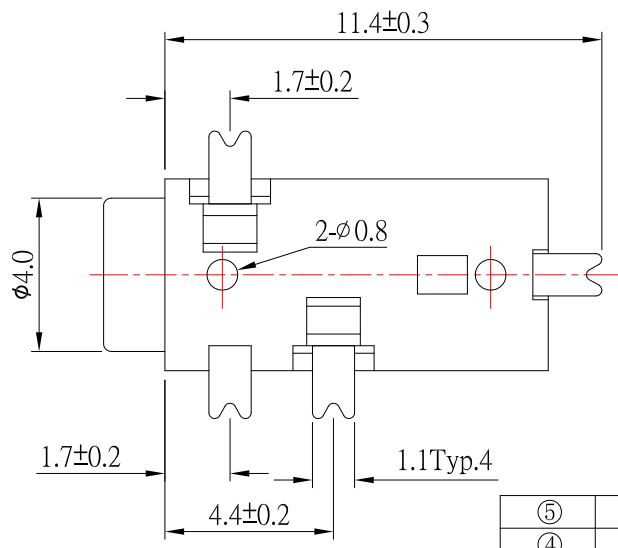

SCHEMATIC



SPECIFICATION

- 1.Rating : DC 30V, 1.0A ;
- 2.Contact resistance : ≤30mΩ ;
- 3.Insulation resistance : ≥100MΩ ;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles °

⑤	HOUSING	1	PA9T	
④	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
③	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
②	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
①	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
DRAWN BY: Jack Lu		DATE: 11/14/19	MATL:	TITLE: PHONE JACK
CHECKED BY: Jacky Chen		DATE: 11/14/19	FINISH:	MODLE: PJ-2684-S124
APPROVED BY: Tony Kao		DATE: 11/14/19	SCALE: 1 : 1	DWG NO. PJ-2684-S124
			SHEET NO. 1 of 1	PART NO. PJ-2684-S124
				SIZE: A4
				VER: R1

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2	3RD. ANGEL'S	UNITS	MM
	Above 5 ~ 15 ±0.3			
	Above 15 ~ 30 ±0.4			
	Above 30 ~ 50 ±0.5			
	Angle ±0.3°			

1	更新plug	Jack	111419
ITEM NO.	DESCRIPTION	DRAWN	DATE