



Ø2.5 MATE PLUG

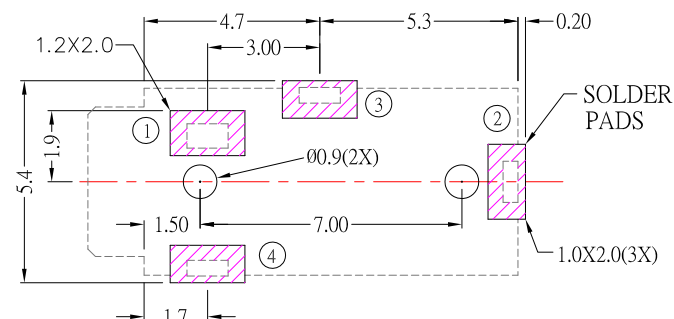

RECOMMENDED
SOLDER PAD LAYOUT

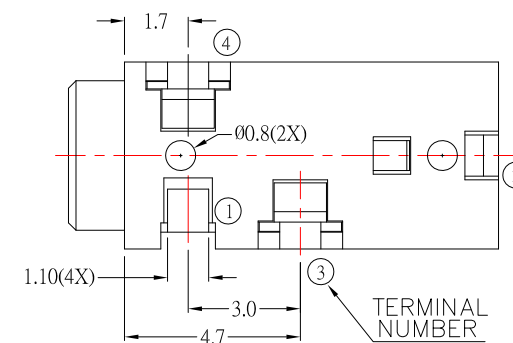

MODEL NO.	PJ-2784D	PJ-2783D
SCHEMATIC		

SPECIFICATION

- 1.Rating : DC 12V 1.0A
- 2.Contact resistance : $\leq 50\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

*MATERIAL

TERMINAL 1 :PHOSPHOR BRONZE
 TERMINAL 2 :PHOSPHOR BRONZE
 TERMINAL 3 :PHOSPHOR BRONZE
 TERMINAL 4 :PHOSPHOR BRONZE
 HOUSING :PA6T

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
 OTHERWISE STATED :
 Up to 5 ± 0.2
 Above 5 ~ 15 ± 0.3
 Above 15 ~ 30 ± 0.4
 Above 30 ~ 50 ± 0.5
 Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
 CHECKED BY: Jacky Chen
 APPROVED BY: Tony Kao

DATE: 11/04/15
 DATE: 11/04/15
 DATE: 11/04/15

MAT'L
 FINISH
 SCALE: 5 : 1
 SHEET NO. 1 of 1

TITLE: JACK
 MODLE: PHONE JACK
 DWG NO. PJ-278xD
 PART NO. PJ-278xD

SIZE: A4
 VER: R1