

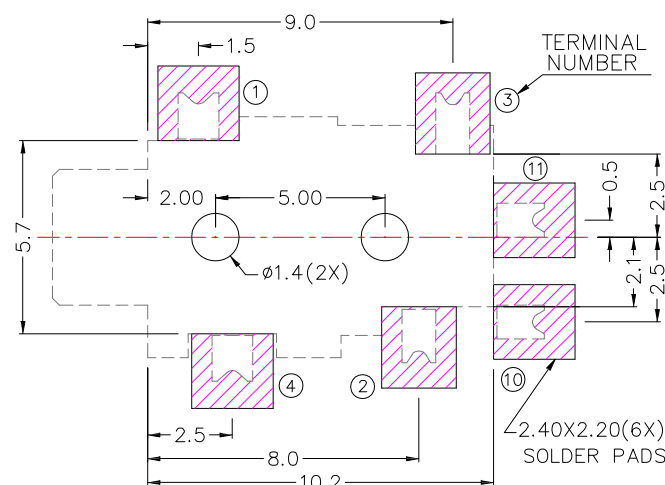
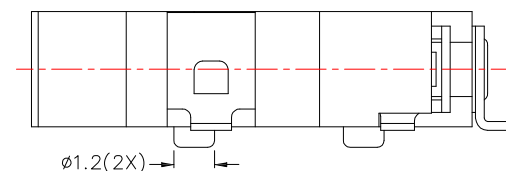


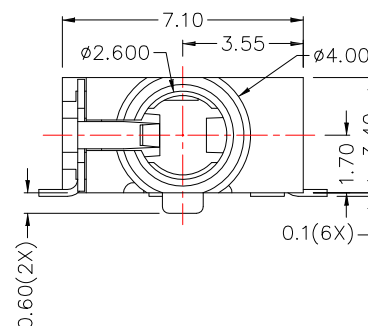

1. Rating : DC 12V 1.0A
2. Contact resistance : $\leq 50\text{m}\Omega$
3. Insulation resistance : $\geq 100\text{M}\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. life test : 5,000 cycles

TERMINAL 1 :PHOSPHOR BRONZE
 TERMINAL 2 :PHOSPHOR BRONZE
 TERMINAL 3 :PHOSPHOR BRONZE
 TERMINAL 4 :PHOSPHOR BRONZE
 TERMINAL 10:BRASS
 TERMINAL 11:BRASS
 HOUSING :PA6T



RECOMMENDED
SOLDER PAD LAYOUT

MODEL NO.	PJ-2796D	PJ-2795AD	PJ-2795BD	PJ-2795D	PJ-2794D
SCHEMATIC					

									DRAWN BY:	DATE	MAT'L	TITLE	JACK		
									Jack Lu	11/04/15					
								CHECKED BY:	DATE	FINISH		MODLE	PHONE JACK		
								Jacky Chen	11/04/15						
										SCALE	1 : 1	DWG NO.	PJ-279xD	SIZE A4	
1		新增SPEC	Jack	110415						APPROVED BY:	DATE			VER A1	
ITEM NO.		DESCRIPTION	DRAWN	DATE					Tony Kao	11/04/15	SHEET NO.	1 of 1	PART NO.	PJ-279xD	
A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P