




P.C.B LAYOUT
TOP VIEW

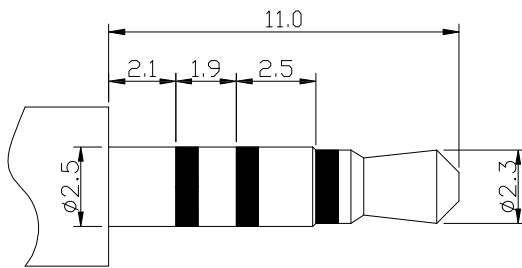

Ø2.50mm 4 POLE PLUG

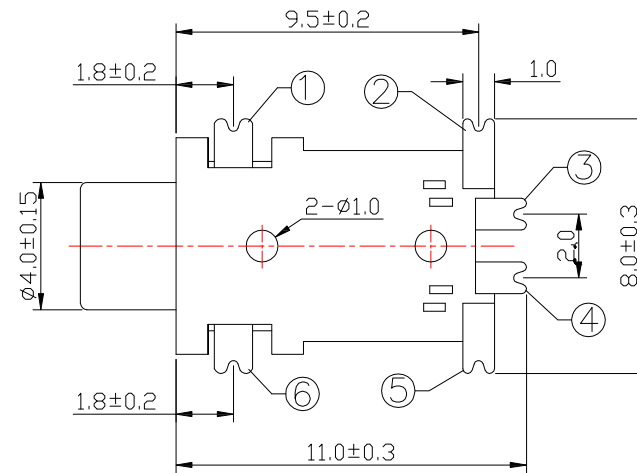

SCHEMATIC



SPECIFICATION

1. Rating : DC 30V, 0.5A ;
2. Contact resistance : ≤ 30mΩ ;
3. Insulation resistance : ≥ 100MΩ ;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 3-20N
6. life test : 5,000 cycles °

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
7	HOUSING	1	PA9T	
6	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
5	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
4	CONTACT FOOT	1	BRASS	Ag-Plating
3	CONTACT FOOT	1	BRASS	Ag-Plating
2	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
1	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:
 Up to 5 ±0.2
 Above 5 - 15 ±0.3
 Above 15 - 30 ±0.4
 Above 30 - 50 ±0.5
 Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	07/26/19		MODLE	PHONE JACK
CHECKED BY:	DATE	SCALE	DWG NO.	PJ-S2027-S124
Jacky Chen	07/26/19	1 : 1	PART NO.	PJ-S2027-S124
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	07/26/19			

ITEM NO.	DESCRIPTION	DRAWN	DATE