

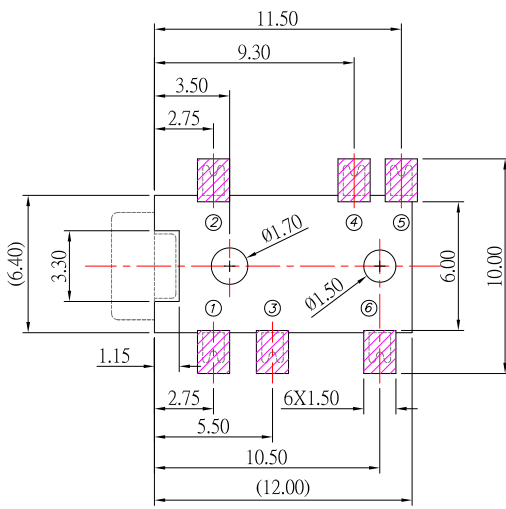

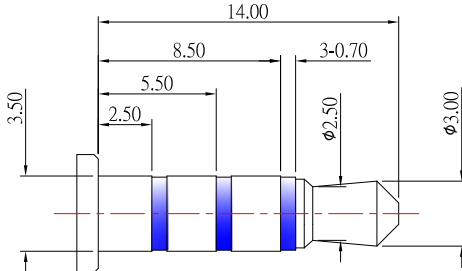


SCHEMATIC



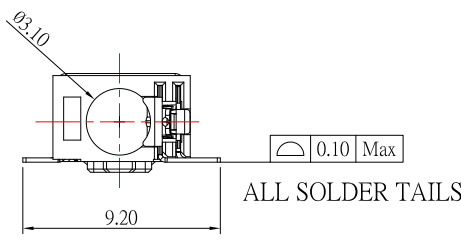


RECOMMENDED PCB LAYOUT
TOP VIEW

- NOTES:
1. CONTACT CURRENT RATING: 1A.
 2. CONTACT RESISTANCE: 50 mΩ MAX.;
 3. INSULATION RESISTANCE: 100MΩ MIN.;
 4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
 5. DURABILITY: 10,000 CYCLES MIN.;
 6. CONNECTOR MATING FORCES: 29.4N (3.00Kgf) MAX.;
 7. CONNECTOR UNMATING FORCES: 2.94N(0.30Kgf) MIN.;



(3.5mm 4 POLE PLUG DETAIL DRAWING)

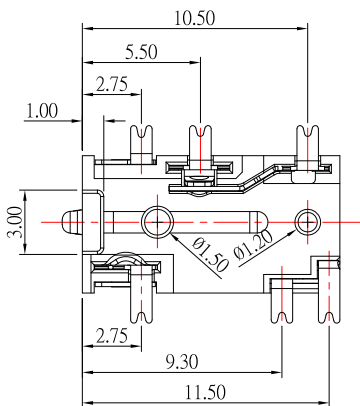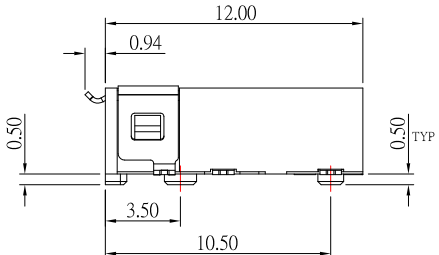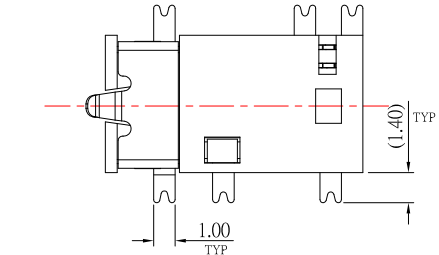

NO SPIGOT

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°
3RD. ANGEL'S
UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Frank Wu	12/22/11		MODLE	PHONE JACK
CHECKED BY:	DATE	FINISH	DWG NO.	PJ-30266-61-S119
Jacky Chen	12/22/11	SCALE	1 : 1	PART NO.
APPROVED BY:	DATE	SHEET NO.	1 of 1	PJ-30266-61-S119
Tony Kao	12/22/11			