

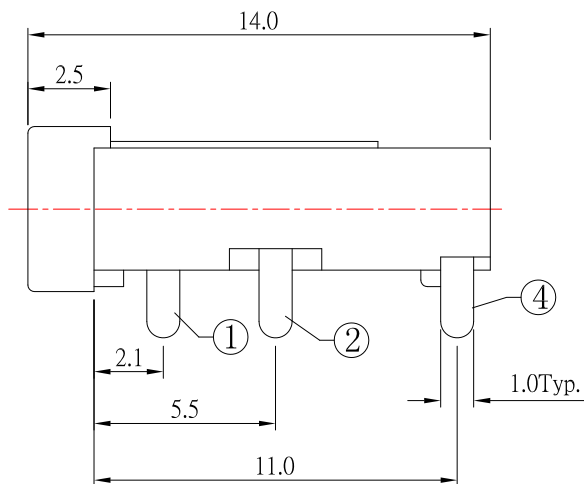
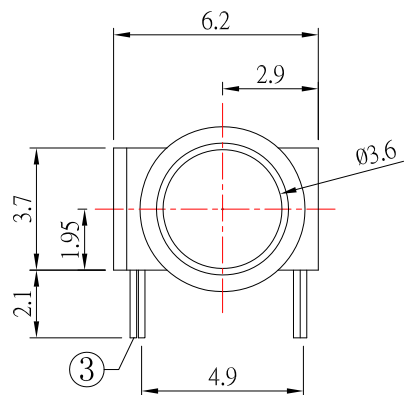


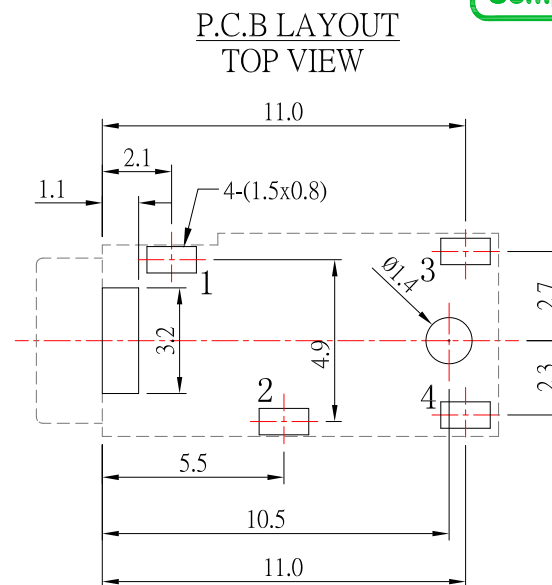



SCHEMATIC

PJ-3854-S125	PJ-3853-S125

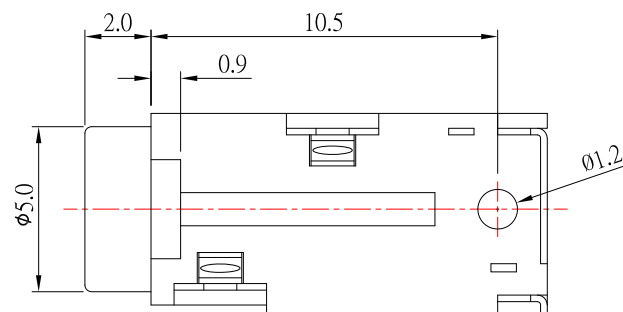

SPECIFICATION

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$ (DC250V) ;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles °

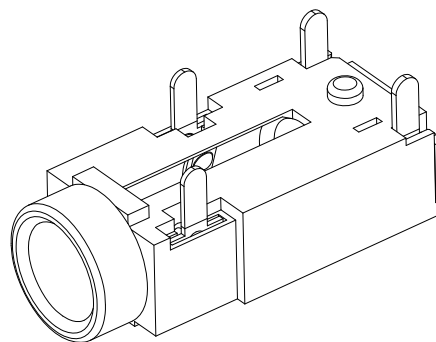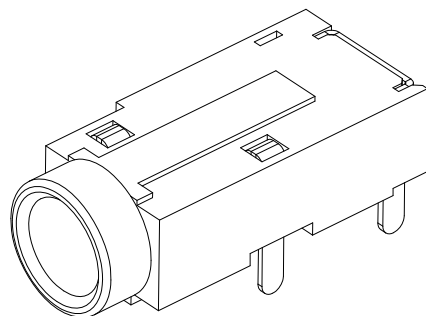

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:
Frank Wu
CHECKED BY:
Jacky Chen
APPROVED BY:
Tony Kao

DATE
11/28/11
DATE
11/28/11
DATE
11/28/11

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

JACK
PHONE JACK
PJ-385x-S125
PJ-385x-S125

SIZE
A4
VER
A

ITEM NO. DESCRIPTION DRAWN DATE